

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Side Spray models includes side spray with Duralock™ quick connect installation
- Operates with less than 5 lbs. of force

## OPERATION

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

## FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

## CARTRIDGE


- 1224 cartridge design
- Nonmetallic/nonferrous and stainless steel material

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

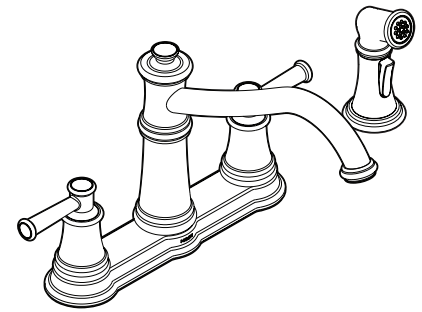

**Belfield™**  
**Two-Handle Kitchen Faucet**

**Model:** 7250 series less Side Spray

**Model:** 7255 series with Side Spray

**NOTE:** 7250 SERIES IS DESIGNED TO INSTALL THROUGH 3 HOLES, 1-1/4" (32MM) MIN. DIA., 4" (102MM) ON CENTER

**NOTE:** 7255 SERIES IS DESIGNED TO INSTALL THROUGH 4 HOLES, 1-1/4" (32MM) MIN. DIA., 4" (102MM) ON CENTER

