

# Gilded Meadow<sup>™</sup> Conical Bell<sup>®</sup>

Above-counter/Wall-mount Bathroom Sink K-45922-DE

## Features

- Vitreous china.
- Above-counter or wall-mount.
- Round basin.
- Without overflow.
- No faucet holes; requires wall- or counter-mount faucet.
- KOHLER Artist Edition.
- Gilded Meadow<sup>™</sup> design on Conical Bell<sup>®</sup>.
- Coordinates with other products with the Gilded Meadow design.
- 16-1/4" (413 mm) diameter

# **Recommended Accessories**

K-7114 Pop-Up Drain K-7129 Drain K-9018 P-Trap K-9655 Wall-mount Bracket

### Components

Additional included component/s: Adjustable linkage.



ADA CSA B651 OBC

Codes/Standards ASME A112.19.2/CSA B45.1 ADA ICC/ANSI A117.1 CSA B651 OBC

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

# **Available Color/Finishes**

Color tiles intended for reference only.

#### Color Code Description


K5 Translucent Cashmere








# Above-counter/Wall-mount Bathroom Sink K-45922-DE

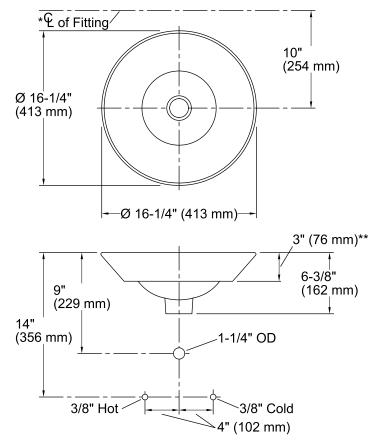



## **Technical Information**

All product dimensions are nominal.	
Bowl configuration:	Single
Installation:	Above-counter, Wall-mount
Bowl area	Diameter: 15-7/8" (403 mm) Water depth: 4-1/4" (108 mm)
Drain hole:	1-3/4" (44 mm)
Template:	1002980-7, required, included

#### Notes

Install this product according to the installation instructions.

Product does not have an overflow.

\*Spout must be 5" (127 mm) long (min) for adequate clearance into the bathroom sink when installed with centerline as shown.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cut-out errors when the incorrect cut-out template is used.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

