


1. General Description

- a. Prefabricated, tileable, structural, pre-sloped, curbless, '0' threshold shower platform with off-center drain hole
- b. Cover with decorative tile, stone, or weldable resilient flooring
- c. Fabricated in controlled conditions to precise engineering tolerances

2. Item Codes and Sizes

- a. 21000 . . . 35½" x 35½"
- b. 21008 . . . 39¾" x 39¾"
- c. 21012 . . . 44¾" x 30¼"
- d. 21018 . . . 47¼" x 47¼"
- e. 21027 . . . 51¼" x 32¼"
- f. 21028 . . . 55⅛" x 35½"
- g. 21036 . . . 59" x 32¼"
- h. 21045 . . . 59" x 47¼"
- i. 21050 . . . 70⅞" x 32¼"

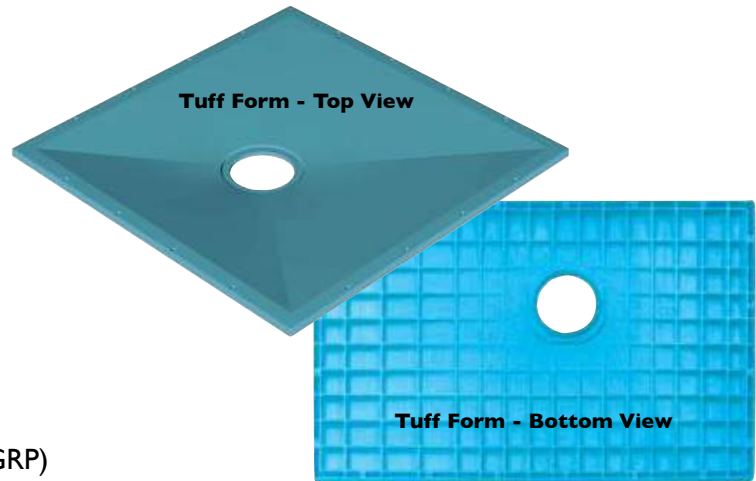

3. Physical Characteristics

- a. Made of fiberglass reinforced plastic (GRP)
- b. Structural; spans 16" o.c. joists
- c. 7/8" -thick edge profile
- d. Four pre-sloped pitch planes meet at off-center drain hole (slopes are 1/8" per foot or greater)
- e. Waffle-pattern ribbing reinforcement throughout
- f. 1¾" -wide leveling rim with pre-bored, countersunk pilot holes
- g. Color: blue
- h. Made from 100% recyclable materials
- i. Installation requires a drain adapter, a 2" solvent weld shower waste, and a waterproofing kit

4. Performance Characteristics

- a. Replace subfloor to achieve level-entry with surrounding floor
- b. Install on joists, on subfloor, in concrete, or on concrete
- c. Installer must support all edges and drain hole per instructions
- d. Cut, drill, and shape as needed with ordinary power tools equipped with fine-toothed blades
- j. Capable of supporting 560 lbs. on joists or 1,100 lbs. with proper support between joists or when installed on subfloor (substructure must meet load requirements)
- e. Trim to as close as 9" from the center of the drain hole
- f. May be rotated to reposition off-center drain hole to avoid obstructions
- g. Waterproofing kit integrates shower platform with surrounding floor and walls
- h. Drains available for tile or vinyl floor coverings
- i. Wet-area approved electric heat, or hydronic heat, may be installed with this shower platform

5. Other Information

- a. Compliance certification: ICC-ES PMG 1223
- b. Limited lifetime warranty—see AKW warranty for details



