

building authority.

Submittal Sheet

6032ITS

Aquatic products may be specified as Lasco Bathware.

essarily meet ADA or other code requirements. Always confirm code compliance with your local

ADA Compliant

CUSTOMER: JOB NAME:	STANDARD FEATURES - Code compliant when fully equipped and installed according to guidelines - Lustrous, durable, easy-to-clean Lucite® cast acrylic	
PO #: QUOTE #: SHIP TO: QUANTITY:	 Integral toiletry shelves Integral dome LH or RH drain location Slip resistant, textured bottom [ASTM F-462] 	
PLUMBING CONTRACTOR APPROVAL GENERAL CONTRACTOR APPROVAL ENGINEER APPROVAL ARCHITECT APPROVAL DATE ARCHITECT APPROVAL DATE	CONFIGURATION Fully equipped with seat — ADA Includes four 24" x 1-1/2" diameter grab bars; tri-fold removable seat; pressure balancing mixing valve and hand-held shower assembly per ADA guidelines CUSTOM OPTIONS (not available if ADA configuration is selected) Fixture Wall	
ADA compliant showers with NO interior threshold will have water escape onto the bathroom floor. Aquatic highly recommends you take the following precautions: 1. Install only the minimum number of ADA units without an interior threshold required for each job. If possible install Aquatic's accessible models that have a ½ interior threshold to reduce the amount of water that escapes from the shower. 2. When installing units with NO interior threshold, install a <u>FLOOR DRAIN</u> to control the water that escapes onto the bathroom floor. 3. Depending on your application, you may choose to install Aquatic's vinyl flexible dam or removable threshold, which helps better retain water within the shower. However, these items may not necessive.	OPTIONAL ACCESSORIES (available for all models) Soap dish Curtain rod (Not ADA compliant) Shower curtain Brass drain Colors: Standard White Upgraded Biscuit Other (contact customer service for custom color options) Additional accessories	Int. Dim. 60 W x 32 D x 80 ½ H Ext. Dim. 65 W x 33 D x 84 H Skirt Ht. 17 skirt Packaged Wt. 185 lbs. gross Material Premium cast acrylic

To complete your order, this document must be signed and faxed to the Aquatic Centralized Customer Service Center.

inches

Warranty Acrylic Finished Products — Five Years




8⁵' EXT.

34 1/2"

6032ITS ADA Compliant

Please indicate changes needed.




FRAMING DIMENSIONS Inches

Α	В	С	D
65 1/8	8 ½	33	15

Installation Options:
1. Install in a recessed pit for rough-in floor installation.
2. Build sub-floor to level finished floor with top of

shower threshold.

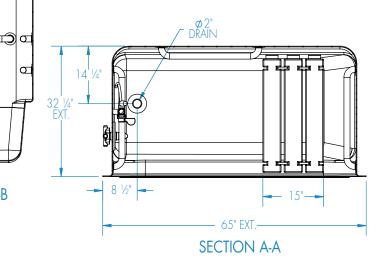

Shell tolerance: ± 0 , -3/8" All other tolerances: ± 1 "

2 ½" -

32" INT.

--

SECTION B-B

Please indicate changes needed.

Reinforcement Locations (Standard)

