# 16034BFSBTTR - ACCESSIBLE SHOWERS

Interior:  $60 \times 34 \times 76 \frac{3}{4}$ Exterior:  $66 \times 36 \frac{1}{8} \times 78 \frac{3}{4}$ 

inches

The 16034BFSBTTR roll-in shower features innovative installation design, including an engineered leveled base and improved front threshold with molded integral linear trench drain. A true time and money saver, our pre-leveled base lets you install directly on a **level** floor. And its front threshold is engineered to keep a constant level with the innovative nailing flange.



Shown fully-equipped

## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support

#### **COLOR & TRIM OPTIONS**

Stock	Upgraded		
White	Biscuit Bone		

<sup>\*\*</sup>Additional custom colors available. (Contact Customer Service)

### **FEATURES**

- Pre-leveled base
- AcrylX<sup>™</sup> applied acrylic surface
- ½" skirt
- ½" beveled threshold
- Barrier free when properly installed
- Smooth large subway tile wall
- Center front drain outlet
- Integral front trench drain
- Lifetime Limited Warranty Residential Use/30-year Commercial Use

## **OPTIONS**

- Grab bars
- Fold-up seat
- Hand-held shower assembly with slide bar
- Pressure balancing mixing valve
- Large soap dish
- Small soap dish
- Curtain rod and/or shower curtain
- 12" high wall extension
- Tamper-proof grate

## CODE COMPLIANCE

- ADA
- FHA
- ICC/ANSI A117.1
- HUD UM73a
- CSA B45.5-11/ IAPMO Z124-2011
  - \*\*Code compliant when fully equipped and installed according to guidelines.



Aquatic products may be specified as Lasco Bathware.






# 16034BFSBTTR

Interior:  $60 \times 34 \times 76 \frac{3}{4}$ Exterior:  $66 \times 36 \frac{1}{8} \times 78 \frac{3}{4}$ 

inches

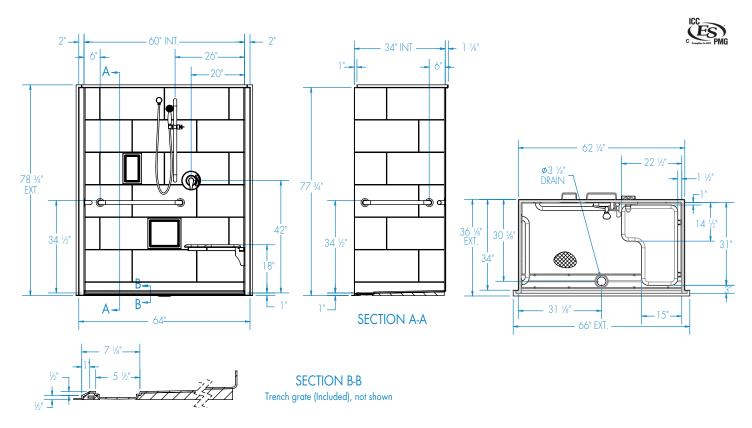

FEATURES Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower 16034BFSBTTR	AcrylX™ applied acrylic	Smooth tile	1	Center Front	½″ skirt ½″ beveled threshold	200	210

#### **DIMENSIONS**

Specifications	inches		
Width: Ext. /Int.	66 / 60		
Depth: Ext. / Int.	36 <b>½</b> / 34		
Height: Ext. / Int.	78 ¾ / 76 ¾		
Enclosure Opening:	60		
Skirt Height:	1/2		
Drain Rough-In (from Back Wall)	30 <b>%</b>		
Drain Rough-In (from Side Wall)	31 1/8		

#### FRAMING DIMENSIONS inches

Туре	<b>D</b> Depth	<b>W</b> Width	<b>H</b> Height	А	В	С
Alcove	34	62 1/4	-	Box Out	31 1/8	30 <b>%</b>

