16034BFSCTTR – ACCESSIBLE SHOWERS

Interior: $60 \times 34 \times 76 \frac{3}{4}$ Exterior: $66 \times 36 \frac{1}{8} \times 78 \frac{3}{4}$

inches

The 16034BFSCTTR roll-in shower features innovative installation design, including an engineered leveled base and improved front threshold with molded integral linear trench drain. A true time and money saver, our pre-leveled base lets you install directly on a **level** floor. And its front threshold is engineered to keep a constant level with the innovative nailing flange.



Shown fully-equipped

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support

COLOR & TRIM OPTIONS

Stock	Upgraded		
White	Biscuit Bone		

^{**}Additional custom colors available. (Contact Customer Service)

FEATURES

- Pre-leveled base
- AcrylX[™] applied acrylic surface
- 1 1/8" skirt
- Barrier free when properly installed
- Smooth large subway tile wall
- Center front drain outlet
- Integral front trench drain
- Lifetime Limited Warranty Residential Use/30-year Commercial Use

OPTIONS

- Grab bars
- Fold-up seat
- Hand-held shower assembly with slide bar
- Pressure balancing mixing valve
- Large soap dish
- Small soap dish
- Curtain rod and/or shower curtain
- Tamper-proof grate
- 12" high wall extension

CODE COMPLIANCE

- ADA
- FHA
- ICC/ANSI A117.1
- HUD UM73a
- CSA B45.5-11/ IAPMO Z124-2011
 - **Code compliant when fully equipped and installed according to guidelines.



Aquatic products may be specified as Lasco Bathware.






16034BFSCTTR

Interior: $60 \times 34 \times 76 \frac{3}{4}$ Exterior: $66 \times 36 \frac{1}{8} \times 78 \frac{3}{4}$

inches

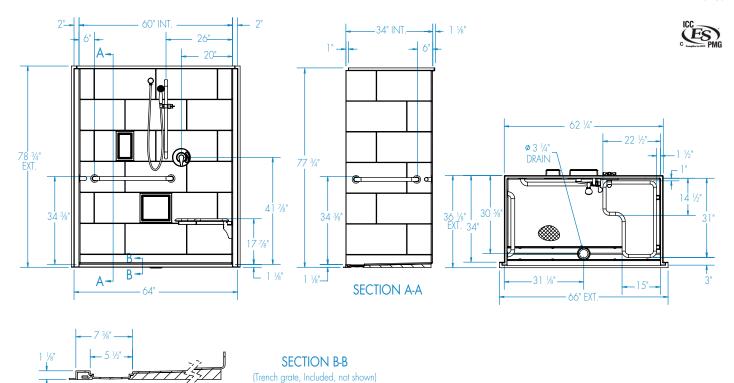

FEATURES Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt. Ibs
Shower 16034BFSCTTR	AcrylX™ applied acrylic	Smooth tile	1	Center Front	1 1/8" skirt	200	210

DIMENSIONS

Specifications	inches	
Width: Ext. / Int.	66 / 60	
Depth: Ext. / Int.	36 1/8 / 34	
Height: Ext. / Int.	78 ¾ / 76 ¾	
Enclosure Opening:	60	
Skirt Height:	1 1/8	
Drain Rough-In (from Back Wall)	30 %	
Drain Rough-In (from Side Wall)	31 1/8	

FRAMING DIMENSIONS inches

Туре	D Depth	W Width	H Height	А	В	С	
Alcove	34	62 1/4	_	Box Out	31 1/8	30 %	

