

# Bayport 6636

Formerly Serenity 5

65  $\frac{3}{4}$  x 35  $\frac{3}{8}$  x 24  $\frac{1}{4}$  inches



## FEATURES ~

- Deep, ergonomic bathing well
- Raised seating
- Sculpted armrests
- Integral clear acrylic grab bars (2)
- Pre-leveled ABS support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty

## AVAILABLE SYSTEMS

### AIR BATH

- Perimeter air injectors
- Variable speed heated-air blower
- Automated purge and dry system
- Electronic control with wave and pulse features
- LED Chromatherapy
- Pre-leveled ABS support base

### HOTSOAK

- 2 low-profile circulation portals
- 1.5 kW inline maintenance heater
- Ultra-quiet low flow circulation pump
- Electronic one-touch on/off control
- Heat-bent rigid PVC piping
- Pre-leveled ABS support base

### DRIFTBATH

- Up to 70 water portals
- Quiet, energy-efficient .75 hp pump with integrated heat-transfer
- Electronic control
- 4 high-intensity LED Chromatherapy
- Available in White or Biscuit
- Pre-leveled ABS support base




Rev 10.17.17

# Bayport 6636

Formerly Serenity 5

65 3/4 x 35 3/8 x 24 1/4

BASE MODEL	PKG. WT. LBS.	DRAIN	MODEL #	MSLP
<input type="checkbox"/> Soaker	181	Univers.	W5AIR6636TO	\$1,737
<input type="checkbox"/> HotSoak	221	Univers.	W5AIR6636HS	\$3,163
<input type="checkbox"/> Air bath	221	Univers.	W5AIR6636	\$3,837
<input type="checkbox"/> DriftBath	233	Univers.	W5AIR6636DB	\$5,355



OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): White (WH)		No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)		\$35
Cast acrylic premium color upgrade (COLUxx): Black (BK) Sterling Silver (ST) Note: DriftBath models available in White and Biscuit only.		\$389
Metallic finish suction fitting (MSxx): HotSoak premium color models only Chrome (CH) Polished Brass (BR) Brushed Nickel (SN)		No charge
Color matched skirt (SKP66)		\$895
Factory installed rigid ABS tile flange (AFxx): Left Tile (LT) Right Tile (RT)		\$185
1" Low profile deck (LPD1) Note: skirt option not available with low profile deck		\$180
Magnetic pillow (MPxxxxx): White (WHPIL) Black (BKPIL)		\$105
Cable drive waste & overflow: Chrome (CDCHCD)		\$345
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)		\$390
Cable drive waste & overflow (CDxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)		\$440
Remote blower wiring kit for remote blower installation (RBK1) Air bath only. Piping and additional parts may be required.		\$185
Remote control kit (includes remote control, control box and short cable) (RCK1) Air bath only.		\$420
Chromatherapy, installed (CLM1) HotSoak only		\$335
Wood shipping crate (PKCR)		\$460
Rush order program* (DELQK)		\$325
Residential delivery with lift gate* (DELLG)		\$454

\*For program terms and conditions, see page iii.

BASE PRICE (insert MSLP of base model selected in upper table)	+ \$	
OPTIONS SUB TOTAL	\$	
ORDER TOTAL	= \$	

Customer Name: \_\_\_\_\_ Date: \_\_\_\_\_

Additional Information: \_\_\_\_\_

Rev 10.17.17

## SERENITY

### PRODUCT FEATURES


- Acrylic grab bars
- Raised seat

For series features see section page.

### ILLUSTRATION KEY

= Blower or Pump Location

### TILE FLANGE CONFIGURATIONS



### ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color (COLxx): ← part number

option code → White (WH)

Example: COLxx + WH = COLWH  
Cast Acrylic stock color in White

Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.


# Bayport 6636

Formerly Serenity 5

65 3/4 x 35 3/8 x 24 1/4 inches



Note: Drop-in Serenity models feature a Pre-leveled ABS Support Base.

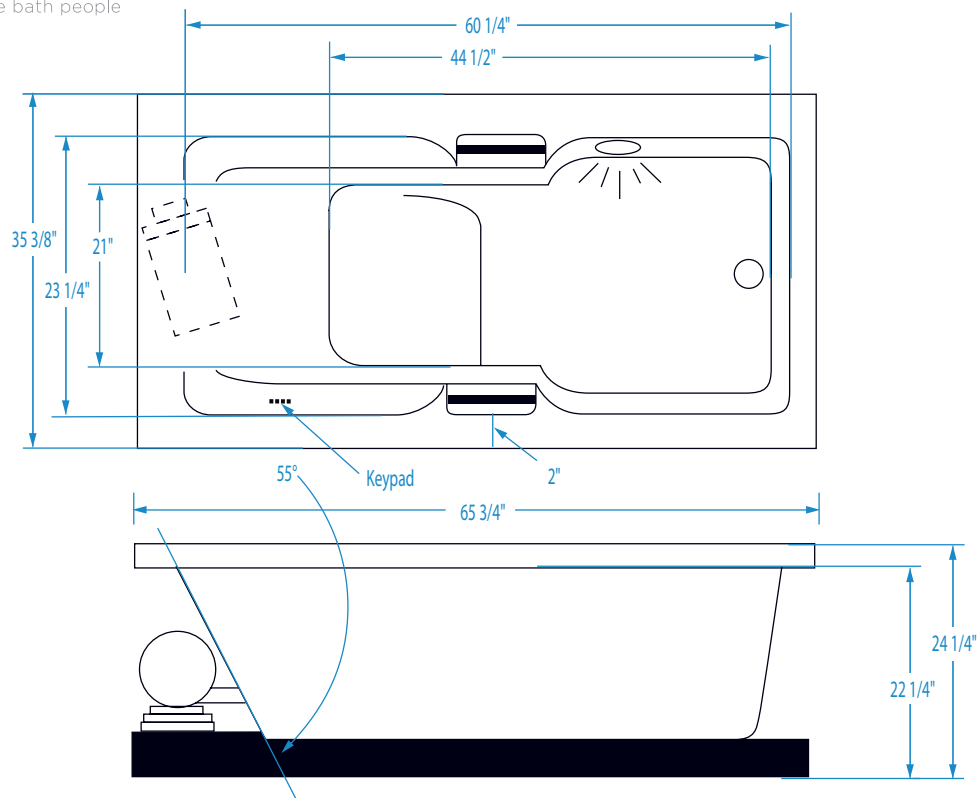

## FEATURES

Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt. lbs
Soaker #VV5AIR6636TO	Cast Acrylic	—	—	—	—	Universal	181
HotSoak #VV5AIR6636HS	Cast Acrylic	Water circulation	Pump	1.5 kW Inline maintenance	Electronic	Universal	221
Air Bath #VV5AIR6636	Cast Acrylic	Air injection	Variable speed blower	Integrated	Electronic	Universal	221
DriftBath #VV5AIR6636DB	Cast Acrylic	Water circulation	Pump	Integrated	Electronic	Universal	232

## DIMENSIONS inches

Width Inches	Depth Inches	Height Inches	Skirt Height
65 3/4	35 3/8	24 1/4 / 22 1/4	—

## SUMP DATA inches

Capacity to Overflow gal	Min. Operating Capacity gal	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
85	—	60 1/4	44 1/2	23 1/4	21

## PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
2 1/2	10	2 / 1 5/8

### NOTES:

- 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 2) 16 x 16 minimum access required at pump/blower location(s).
- 3) For Low Profile Deck, framing height will need to be increased by an additional 1".
- 4) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

## ELECTRICAL DATA

Component	Specification	Requirement
Heated Blower (Air Bath)	10.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Pump (HotSoak)	1/15 HP; 1.3 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI
Heater (HotSoak)	1.5 kW; 12 AMP; 120V	
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

Rev 10.17.17