

# CASTAWAY OVAL

ESTATE SERIES

70 ¼ x 35 ½ x 24 ¼

WHIRLPOOL MODEL #W7236CLO

AIR-WHIRLPOOL MODEL #W23LUX7036



## FEATURES ~

- Deep, ergonomic bathing well
- Sculpted armrests
- Integral clear acrylic grab bar (1)
- Pre-leveled ABS support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty



## AVAILABLE SYSTEMS

### WHIRLPOOL

- Electronic control
- 8 hydrotherapy jets
  - 3-jet back, shoulder and neck massage system (dual port, spinning)
  - Leg and foot jets
- Whirlpool pump

### AIR-WHIRLPOOL COMBINATION


- Whirlpool system, plus:
- Perimeter air system
- Variable speed heated-air blower with purge and dry cycle
- Electronic wave and pulse modes
- 1.5kW inline maintenance heater



# CASTAWAY OVAL

70 ¼ x 35 ½ x 24 ¼

BASE MODEL	PKG. WT. LBS.	JETS	DRAIN	MODEL #	MSLP
<input type="checkbox"/> Whirlpool	201	8	Center Front	<b>W7236CLO</b>	\$4,233
<input type="checkbox"/> Air-Whirlpool	246	8	Center Front	<b>W23LUX7036</b>	\$5,821



OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): White (WH)	_____	No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)	_____	\$35
Cast acrylic premium color upgrade (COLUxx): Black (BK) Sterling Silver (ST)	_____	\$389
Pump location (PLxx): Standard Location (L1) Location 2 (L2) Location 3 (L3) Location 4 (L4) (whirlpool only)	_____	No charge
Metallic trim finish: Chrome (MTCH)	_____	\$315
Metallic trim finish (MTxx): Polished Brass (BR) Brushed Nickel (SN)	_____	\$390
Magnetic pillow (MPxxxxx): White (WHPIL) Black (BKPIL)	_____	\$105
Cable drive waste & overflow: Chrome (CDCHCD)	_____	\$345
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)	_____	\$390
Cable drive waste & overflow (CDxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)	_____	\$440
Chromatherapy, installed (CLM1)	_____	\$335
Inline heater - 1.5kW, factory installed (whirlpool only) (HTH1)	_____	\$400
Wood shipping crate (PKCR)	_____	\$460
Rush order program* (DELQK)	_____	\$325
Residential delivery* (DELRD)	_____	\$205
Residential delivery with lift gate* (DELLG)	_____	\$454

\*For program terms and conditions, see page iii.

BASE PRICE (insert MSLP of base model selected in upper table)

+ \$ \_\_\_\_\_

OPTIONS SUB TOTAL

\$ \_\_\_\_\_

ORDER TOTAL

= \$ \_\_\_\_\_

Customer Name: \_\_\_\_\_ Date: \_\_\_\_\_

Additional Information:

## ESTATE

### PRODUCT FEATURES

- Two person bath
- Acrylic grab bar
- Sculpted armrests

### ILLUSTRATION KEY

#### AIR-WHIRLPOOL MODELS

**P** = Pump Location**B** = Blower Location

#### WHIRLPOOL ONLY MODELS

**P** = Pump Location

### ORDERING KEY


In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color ((COLxx)): ← part number

option code → White (WH)


**Example:** COLxx + WH = COLWH  
Cast Acrylic stock color in White

Manufacturer reserves the right to  
discontinue models, colors, options  
and trim finishes without notice.

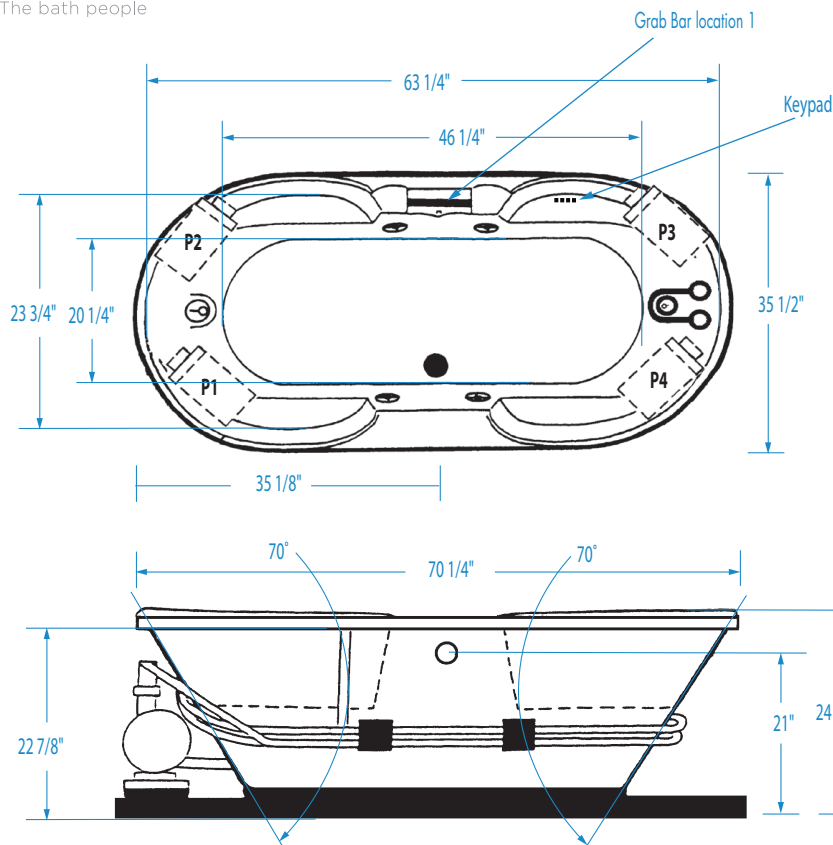


## CASTAWAY OVAL

70 1/4 x 35 1/2 x 24 1/4 inches



Note: For Air-whirlpool, no alternate pump/blower location available.



**FEATURES** lbs (kg) Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Whirlpool #W7236CLO	Cast Acrylic	8	102 GPM	—	—	1.5 kw Inline (optional)	Electronic	Center Front	201
Air-Whirlpool #W23LUX7036	Cast Acrylic	8	102 GPM	Channel	Variable speed	1.5 kw Inline	Electronic	Center Front	246

### DIMENSIONS inches

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
70 1/4	35 1/2	24 1/4	—

### SUMP DATA inches

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
80	61	63 1/4	46 1/4	23 3/4	20 1/4

### PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
5 3/8	12	2 / 3/4

### ELECTRICAL DATA

Component	Specification	Requirement
Pump	9 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Optional Heater	1.5 kW; 12 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Blower	1.0 HP; 9.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

#### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 minimum access required at pump/blower location(s).

3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

#### NOTE:

1) This whirlpool must be hard wired to the breaker box. Three outlets will be supplied on the air-whirlpool.