60 x 32 x 22 3/4 inches





FEATURES ~

- Deep, ergonomic bathing well
- Extended skirt for above-floor plumbing
- Stepped integral 3T flange
- Pre-leveled support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty

AVAILABLE SYSTEMS

AIR BATH



- Perimeter air injectors
- Variable speed heated-air blower
- Automated purge and dry system
- Electronic control with wave and pulse features
- LED Chromatherapy
- Pre-leveled ABS support base

HOTSOAK



- 2 low-profile circulation portals
- 1.5 kW inline maintenance heater
- Ultra-quiet low flow circulation pump
- Electronic one-touch on/off control
- Heat-bent rigid PVC piping
- Pre-leveled ABS support base

DRIFTBATH 📚



- Up to 70 water portals
- Quiet, energy-efficient .75 hp pump with integrated heat-transfer
- Electronic control
- 4 high-intensity LED Chromatherapy
- Available in White or Biscuit
- Pre-leveled ABS support base







Ellis 60325 Formerly Serenity 49

60 × 32 × 22 3/4

BASE MODEL	PKG. WT. LBS.	DRAIN	MODEL#	MSLP
□ Soaker	120	LH or RH	W49AIR6032T0	\$1,741
□ HotSoak	150	LH or RH	W49AIR6032HS	\$2,897
□ Air bath	150	LH or RH	W49AIR6032	\$3,956
□ DriftBath	161	LH or RH	W49AIR6032DB	\$5,080





OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLF
Cast acrylic stock color (COLxx): White (WH)		No charg
Cast acrylic color upgrade (COLxx): Biscuit (BI)		\$3
Cast acrylic premium color upgrade (COLUxx): Black (BK) Sterling Silver (ST) Note: DriftBath models available in White and Biscuit only.		\$389
Metallic finish suction fitting (MSxx): HotSoak premium color models only Chrome (CH) Polished Brass (BR) Brushed Nickel (SN)		No charg
Drain Location (DLxx): Left Hand (LH) Right Hand (RH)		No charg
Magnetic pillow (MPxxxxxx): White (WHPIL) Black (BKPIL)		\$10
Cable drive waste & overflow: Chrome (CDCHCD)		\$34
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)		\$39
Cable drive waste & overflow (CDxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nick	xel (SNCD)	\$44
Linear waste & overflow (LDxxxxx): Chrome (CHLO)		\$34
Linear waste & overflow (LDxxxxx): Biscuit (BILO) White (WHLO)		\$39
Linear waste & overflow (LDxxxxx): Oil Rubbed Bronze (OBLO) Brushed Nickel (SNLO)		\$44
Remote blower wiring kit for remote blower installation (RBK1) Air bath only. Piping and additional parts may be required.		\$18:
Remote control kit (includes remote control, control box and short cable) (RCK1) Air bath only.		\$42
Chromatherapy, installed (CLM1) HotSoak only		\$33
Wood shipping crate (PKCR)		\$46
Rush order program* (DELQK)		\$32
Quick ship program* (DELSN)		No charg
Residential delivery with lift gate* (DELLG)		\$45
*For program terms and conditions, see page iii.		
BASE PRICE (insert MSLP of base model selected in upper table)	+\$	
OPTIONS SUB TOTAL	\$	
ORDER TOTAL	= \$	
Eustomer Name:	Date:	
Additional Information:		

SERENITY

PRODUCT FEATURES

- · Deep bathing well
- Extended skirt allows for above-the-floor installation of waste, overflow and drainage
- · Integral tiling flange (3T)

For series features see section page.

ILLUSTRATION KEY

= Blower or Pump Location

ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color (COLxx): ← part number


option code → White (WH)

Example: COLxx + WH = COLWH

Cast Acrylic stock color in White

Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.



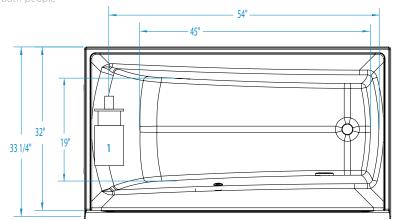



Ellis 6032S

Formerly Serenity 49

 $60 \times 32 \times 22 \frac{3}{4}$ inches



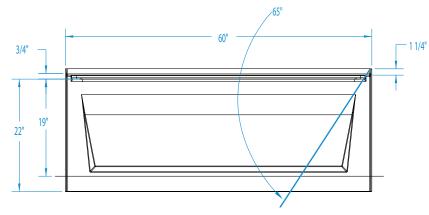



FEATURES Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt. Ibs
Soaker #W49AIR6032TO	Cast Acrylic	-	_	_	_	LH or RH	113
Hotsoak #W49AIR6032HS	Cast Acrylic	Water circulation	Pump	1.5 kW Inline maintenance	Electronic	LH or RH	143
DriftBath #W49AIR6032DB	Cast Acrylic	Water circulation	Pump	Integrated	Electronic	LH or RH	154
Air Bath #W49AIR6032	Cast Acrylic	Air injection	Variable speed blower	Integrated	Electronic	LH or RH	143

DIMENSIONS inches

Width	Depth	Height	Skirt
Inches	Inches	Inches	Height
60	33 1/4 / 32	24 ¼ / 22 ¾	

PLUMBING DIMENSIONS inches

А	В	Drain to Overflow	Drain Diameter / Clearance
1 1/2	8 ½	14	2 / 3 1/4

NOTES

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16×16 minimum access required at pump/blower location(s).

3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

SUMP DATA inches

Capacity to Min. Operating Overflow Capacity		WIDTH @	WIDTH @ centerline		DEPTH @ centerline	
gal	gal	Тор	Bottom	Тор	Bottom	
55	30	54	45	22	19	

ELECTRICAL DATA

Component	Specification	Requirement	
Pump (HotSoak)	1/15 HP; 1.3 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI	
Heater (HotSoak)	1.5 kW; 12 AMP; 120V		
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI	
Heated Blower (Air Bath)	10.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI	

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

Rev 08.21.17