

Fullerton 7042C

Formerly Serenity 2

70 1/8 x 41 5/8 x 27 1/8 inches



FEATURES ~

- Deep, ergonomic bathing well
- Raised seating
- Sculpted armrests
- 2-person bathing
- Integral clear acrylic grab bar
- Pre-leveled ABS support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty



AVAILABLE SYSTEMS

AIR BATH

- Perimeter air injectors
- Variable speed heated-air blower
- Automated purge and dry system
- Electronic control with wave and pulse features
- LED Chromatherapy
- Pre-leveled ABS support base

HOTSOAK

- 2 low-profile circulation portals
- 1.5 kW inline maintenance heater
- Ultra-quiet low flow circulation pump
- Electronic one-touch on/off control
- Heat-bent rigid PVC piping
- Pre-leveled ABS support base

DRIFTBATH

- Up to 70 water portals
- Quiet, energy-efficient .75 hp pump with integrated heat-transfer
- Electronic control
- 4 high-intensity LED Chromatherapy
- Available in White or Biscuit
- Pre-leveled ABS support base




Rev 10.17.17

Fullerton 7042C

Formerly Serenity 2

70 1/8 x 41 5/8 x 27 1/8

BASE MODEL	PKG. WT. LBS.	DRAIN	MODEL #	MSLP
<input type="checkbox"/> Soaker	184	Center Front	W2AIR7042TO	\$2,105
<input type="checkbox"/> HotSoak	214	Center Front	W2AIR7042HS	\$3,355
<input type="checkbox"/> Air bath	214	Center Front	W2AIR7042	\$4,485
<input type="checkbox"/> DriftBath	226	Center Front	W2AIR7042DB	\$5,547



OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): White (WH)		No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)		\$35
Cast acrylic premium color upgrade (COLxx): Black (BK) Sterling Silver (ST) Note: DriftBath models available in White and Biscuit only.		\$389
Metallic finish suction fitting (MSxx): HotSoak premium color models only Chrome (CH) Polished Brass (BR) Brushed Nickel (SN)		No charge
Pump / blower location (PLxx): Standard Location (L1) Location 2 (L2) Refer to drawing for location choices.		No charge
Bolt-on grab bar (1) (BOGBxxx): Chrome (SS1) White (WH1) Biscuit (BI1)		\$105
Bolt-on grab bar (1) (BOGBxxx): Polished Brass (BR1) Brushed Nickel (SN1) Oil Rubbed Bronze (OB1)		\$129
Magnetic pillow (MPxxxxx): White (WHPIL) Black (BKPIL)		\$105
Cable drive waste & overflow: Chrome (CDCHCD)		\$345
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)		\$390
Cable drive waste & overflow (CDxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)		\$440
Remote blower wiring kit for remote blower installation (RBK1) Air bath only. Piping and additional parts may be required.		\$185
Remote control kit (includes remote control, control box and short cable) (RCK1) Air bath only.		\$420
Chromatherapy, installed (CLM1) HotSoak only		\$335
Wood shipping crate (PKCR)		\$460
Rush order program* (DELQK)		\$325
Residential delivery with lift gate* (DELLG)		\$454

BASE PRICE (insert MSLP of base model selected in upper table)

+ \$ _____

OPTIONS SUB TOTAL

\$ _____

ORDER TOTAL

= \$ _____

Customer Name: _____ Date: _____

Additional Information:


SERENITY

PRODUCT FEATURES

- Two person bath
- Acrylic grab bar
- Raised seats
- Sculpted armrests

For series features see section page.

ILLUSTRATION KEY

 = Blower or Pump Location

ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color (COLxx) ← part number

option code → White (WH)

Example: COLxx + WH = COLWH
Cast Acrylic stock color in White

Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.



Fullerton 7042C

Formerly Serenity 2

70 1/8" x 41 5/8" x 27 1/8" inches



Note: Drop-in Serenity models feature a Pre-leveled ABS Support Base.

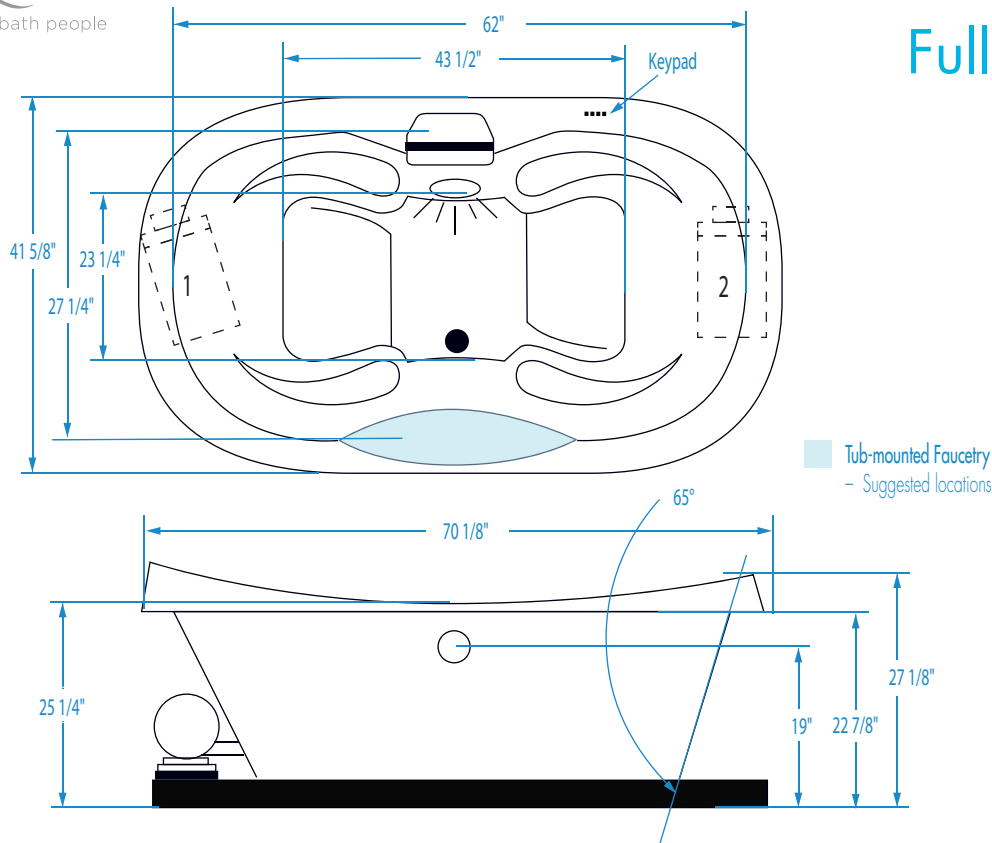

FEATURES

Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt. lbs
Soaker #W2AIR7042TO	Cast Acrylic	—	—	—	—	Center Front	184
HotSoak #W2AIR7042HS	Cast Acrylic	Water circulation	Pump	1.5 kW Inline maintenance	Electronic	Center Front	214
Air Bath #W2AIR7042	Cast Acrylic	Air injection	Variable speed blower	Integrated	Electronic	Center Front	214
DriftBath #W2AIR7042DB	Cast Acrylic	Water circulation	Pump	Integrated	Electronic	Center Front	225

DIMENSIONS inches

Width Inches	Depth Inches	Height Inches	Skirt Height
70 1/8"	41 5/8"	27 1/8" / 22 7/8"	—

SUMP DATA inches

Capacity to Overflow gal	Min. Operating Capacity gal	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
95	—	62	43 1/2"	27 1/4"	23 1/4"

PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
5 3/4"	13 1/4"	2" / 1 3/4"

NOTES:

- Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 16 x 16 minimum access required at pump/blower location(s).
- If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

ELECTRICAL DATA

Component	Specification	Requirement
Heated Blower (Air Bath)	10.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Pump (HotSoak)	1/15 HP; 1.3 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI
Heater (HotSoak)	1.5 kW; 12 AMP; 120V	
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

Rev 10.17.17