60 x 35 x 23 1/2

WHIRLPOOL LEFT DRAIN MODEL #W6032ISL WHIRLPOOL RIGHT DRAIN MODEL #W6032ISR AIR-WHIRLPOOL LEFT DRAIN MODEL #W32LUX6032ISL AIR-WHIRLPOOL RIGHT DRAIN MODEL #W32LUX6032ISR



FEATURES -

- Integral skirt with removable access panels
- Integral tile flange
- Deep, ergonomic bathing well
- Sculpted armrests
- Bolt-on grab bars (chrome or color matched)
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty

AVAILABLE SYSTEMS

WHIRLPOOL 🔭

- Electronic control
- 7 hydrotherapy jets
 - 3-jet back, shoulder and neck massage system (dual port, spinning)
 - Leg and foot jets
- Whirlpool pump

AIR-WHIRLPOOL COMBINATION 5




- Whirlpool system, plus:
- Perimeter air system
- Variable speed heated-air blower with purge and dry cycle
- Electronic wave and pulse modes
- 1.5kW inline maintenance heater



SANTA CLARA

60 x 35 x 23 ½

ВА	SE MODEL	PKG. WT. LBS.	JETS	DRAIN	MODEL #	MSLP
	Whirlpool	135	7	Left	W6032ISL	\$4,060
	Whirlpool	135	7	Right	W6032ISR	\$4,060
	Air-Whirlpool	292	7	Left	W32LUX6032ISL	\$5,845
	Air-Whirlpool	292	7	Right	W32LUX6032ISR	\$5,845



OPTIONS (x = insert desired option code)		ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): White (WH)			No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)			\$35
Metallic trim finish: Chrome (MTCH)			\$315
Metallic trim finish (MTxx): Polished Brass (BR) Brushed Nickel (SN)			\$390
Bolt-on grab bars (2) (BOGBxxx): Chrome (SS2) White (WH2) Biscuit (BI2)			No charge
Bolt-on grab bars (2) (BOGBxxx): Polished Brass (BR2) Brushed Nickel (SN2) Oil Rubbed Bronze (OB2)			\$250
Magnetic pillow (MPxxxxxx): White (WHPIL) Black (BKPIL)			\$105
Cable drive waste & overflow: Chrome (CDCHCD)			\$345
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)			\$390
Cable drive waste & overflow (CDxxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)		\$440
Chromatherapy, installed (CLM1)			\$335
Inline heater - 1.5kW, factory installed (whirlpool only) (HTH1)			\$400
Wood shipping crate (PKCR)			\$460
Rush order program* (DELQK)			\$325
Residential delivery* (DELRD)			\$205
Residential delivery with lift gate* (DELLG)			\$454
*For program terms and conditions, see page iii.			
BASE PRICE (insert MSLP of base model selected in upper table)	+\$		
OPTIONS SUB TOTAL	\$		
ORDER TOTAL	= \$		



ESTATE

PRODUCT FEATURES

- · Sculpted armrests
- · Integral tile flange
- · Integral skirt with removable front access panels
- · Skirted models only available in White and Biscuit

ILLUSTRATION KEY

AIR-WHIRLPOOL MODELS





WHIRLPOOL ONLY MODELS



= Pump Location

ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color ((COLxx): ← part number

option code → White (WH)

Example: COLxx + WH = COLWH

Cast Acrylic stock color in White


Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.

Customer Name: _____ Date: _____
Additional Information:



SANTA CLARA

60 x 35 x 23 1/2 inches

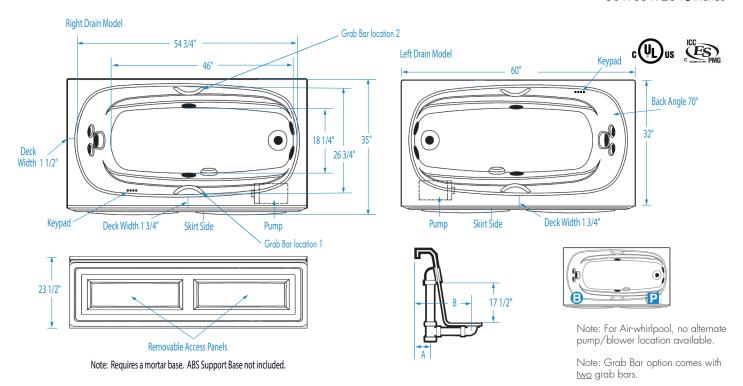

FEATURES | lbs (kg) | Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

							•		
Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Whirlpool #W6032ISL/R	Cast Acrylic	7	102 GPM	_	_	1.5 kw Inline (optional)	Electronic	LH or RH	135
Air-Whirlpool #W32LUX6032ISL/R	Cast Acrylic	7	102 GPM	Channel	Variable speed	1.5 kw Inline	Electronic	LH or RH	292

DIMENSIONS inches

Width	Depth	Height	Skirt
Overall / Net	Overall / Net	Overall / Net	Height
60	35	23 ½	

PLUMBING DIMENSIONS inches

А	В	Drain Diameter / Clearance		
] 5/ ₈	9 1/4	2 / 2 7/8		

NOTES:

- 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 2) 16 x 16 minimum access required at pump/blower location(s).
- 3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

SUMP DATA inches

Capacity to Overflow	Capacity to Min. Operating Overflow Capacity		centerline	DEPTH @	DEPTH @ centerline	
gal (ltr)	gal (ltr)	Тор	Bottom	Тор	Bottom	
69	50	54 ¾	46	26 ¾	18 1/4	

ELECTRICAL DATA

Component	Specification	Requirement		
Pump	9 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI		
Optional Heater	1.5 kW; 12 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI		
Blower	1.0 HP; 9.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI		

NOTE:

1) This whirlpool must be hard wired to the breaker box. Three outlets will be supplied on the air-whirlpool.