$66 \times 36 \times 25 \frac{1}{2}$ inches





FEATURES ~

- Deep, ergonomic bathing well
- Freestanding design
- Slip resistant floor
- Premium cast acrylic surface*
- Ships in wood crate
- Limited lifetime warranty

COLOR & TRIM OPTIONS

| Stock | Premium |
|---------|-----------------|
| Biscuit | Black |
| White | Sterling Silver |

* Interior bathing well and exterior shell can be different colors

AVAILABLE SYSTEMS

AIR BATH



- Perimeter air injectors
- Variable speed heated-air blower
- Automated purge and dry system
- Electronic control with wave and pulse features
- Remote blower kit with 25-ft cabling and remote control





SoCo 6636F Formerly Serenity 24

66 x 36 x 25 1/2

| BASE MODEL | PKG. WT. LBS. | DRAIN | MODEL # | MSLP |
|------------|------------------|----------|---------------|---------|
| □ Soaker | 253 | Univers. | W24AIR6636FTO | \$5,547 |



Date:

| OPTIONS (x = insert desired option code) | ENTER DESIRED OPTION CODE | MSLP |
|---|---------------------------|-----------|
| Cast acrylic stock color, interior bathing well (ICOLxx): White (WH) | | No charge |
| Cast acrylic color upgrade, interior bathing well (ICOLxx): Biscuit (BI) | | \$35 |
| Cast acrylic premium color upgrade, interior bathing well (ICOLUxx): Black (BK) Sterling Silver (ST) | | \$389 |
| Cast acrylic stock color, exterior shell (ECOLxx): White (WH) | | No charge |
| Cast acrylic upgrade color, exterior shell (ECOLxx): Biscuit (BI) | | \$35 |
| Cast acrylic premium color upgrade, exterior shell (ECOLUxx): Black (BK) Sterling Silver (ST) | | \$389 |
| Freestanding waste & overflow: Chrome (FDCHCD) | | \$330 |
| Freestanding waste & overflow: White (FDWHCD) | | \$450 |
| Freestanding waste & overflow (FDxxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD) | | \$515 |
| Remote control kit (includes remote control, control box and short cable) (RCK1) Air bath only. | | \$420 |
| Rush order program [⋆] (DELQK) | | \$325 |
| Residential delivery with lift gate* (DELLG) | | \$454 |
| *For program terms and conditions, see page iii. | | |
| BASE PRICE (insert MSLP of base model selected in upper table) + \$ | | |
| OPTIONS SUB TOTAL \$ | | |
| ORDER TOTAL = \$ | | |

SERENITY

PRODUCT FEATURES

- \cdot Interior bathing well and exterior can be different colors
- · Wood shipping crate

For series features see section page.

ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cost Acrylic stock color ((COLxx): ← part number

option code → White (WH)


Example: COLxx + WH = COLWH Cast Acrylic stock color in White

> Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.

Additional Information:

Customer Name:



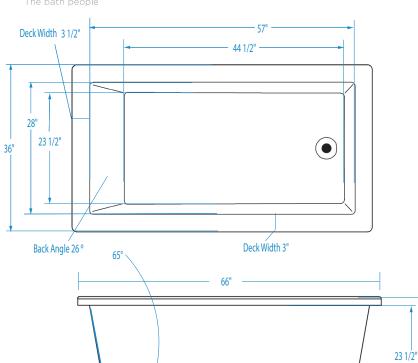


52 1/2"

SoCo 6636F

Formerly Serenity 3

 $66 \times 36 \times 25 \frac{1}{2}$ inches





Note: Low profile pedestal prohibits use of decorative drain pipe flange.

$\label{eq:features} \textbf{FEATURES} \qquad \text{Dimensional Tolerance} \pm 3/8 \text{''}. \text{ Dimensions needed for site preparation should be measured from the unit. } \\ \text{Manufacturer assumes no responsibility for preparatory work.} \\$

| Type and Model # | Material | System | Powered By | Heater | Controls | Drain | Pkg. Wt. lbs |
|-----------------------|--------------|---------------|--------------------------|------------|------------|-----------|-----------------|
| Soaker #W24AIR6636FTO | Cast Acrylic | - | - | - | = | Universal | 253 |
| Air Bath #W24AIR6636F | Cast Acrylic | Air injection | Variable speed blower | Integrated | Electronic | Universal | 283 |

3 1/4"

25 1/2"

DIMENSIONS inches

| Width | Depth | Height | Skirt |
|--------|--------------|-------------|--------|
| Inches | Inches | Inches | Height |
| 66 | 36 | 25 ½ | |

PLUMBING DIMENSIONS inches

| А | В | Drain Diameter / Clearance |
|-------|--------|--------------------------------------|
| 2 3/4 | 10 1/2 | |

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16×16 minimum access required at pump/blower location(s).

SUMP DATA inches

| Capacity to Overflow | Min. Operating Capacity | WIDTH @ centerline | | DEPTH @ centerline | |
|-------------------------|-------------------------|--------------------|--------|--------------------|--------|
| gal Gal | ' , ' | Тор | Bottom | Тор | Bottom |
| 89 | = | 57 | 44 1/2 | 28 | 23 ½ |

ELECTRICAL DATA

| Component | Specification | Requirement |
|--------------------------|----------------|---|
| Heated Blower (Air Bath) | 10.5 AMP; 120V | 15 AMP; 120V, separate circuit; Class A GFCI |

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.