


1363BFSCMA

521 CMR Compliant*

CUSTOMER:		STANDARD FEATURES			
JOB NAME:		Code compliant when fully equipped and installed according to guidelines Pre-leveled base			
PO #: QUANTITY:		 Center drain location Slip resistant, textured bottom [ASTM F-462] 			
		☐ Fully equipped-521CMR* Seat location ☐ LH ☐ RH			
		Includes two 30" x 1¼" diameter etched grab bars; white-cushioned, rectangular fold-up seat; pressure balancing mixing valve and hand-held shower assembly (on back wall offset seat), per 521 CMR guidelines			
F	PLUMBING CONTRACTOR APPROVAL DATE	CUSTOM OPTIONS (not available if 521 CMR config. is selected)		 	
	GENERAL CONTRACTOR APPROVAL DATE	Fixture Wall	 64		
,	GENERAL CONTRACTOR AFFROVAL	☐ Etched grab bars: Two 30" x 1¼" dia. (side wall) ☐ Hand-held shower assembly with 30" slide bar and 60" hose	6		
	ENGINEER APPROVAL DATE	Pressure balancing mixing valve			
	ARCHITECT APPROVAL	OPTIONAL ACCESSORIES (available for all models) Soap dish Curtain rod Shower curtain Vinyl flexible dam Removable threshold			
IMPORTA	ADA compliant showers with NO interior threshold will have water escape onto the bathroom floor. Aquatic highly recommends you take the following precautions:	Brass drain Colors:			
job. If possible the amount o 2. When installir	ne minimum number of ADA units without an interior threshold required for each e install Aquatic's accessible models that have a ½" interior threshold to reduce of water that escapes from the shower. In units with NO interior threshold, install a <u>FLOOR DRAIN</u> to control the water and the bather of the short of the short of the water of the bather of the short of th	Standard	Int. Dim. Ext. Dim. Skirt Ht.	36 W x 3 38 W x 3 ¾ skirt, N	
3. Depending on threshold, whi	onto the bathroom floor. your application, you may choose to install Aquatic's vinyl flexible dam or removable ich helps better retain water within the shower. However, these items may not nec- ADA or other code requirements. Always confirm code compliance with your local ority.	For pricing of units and additional options, reference the Aquatic Price Book. *This configuration may not be compliant in all applications. Call customer service to confirm MA code compliance.	Packaged Wt. Material Warranty	182 lbs. q AcrylX™ c AcrylX™ F (30 year	



36 D x 75 H 38 ¼ D x 77 H NO interior threshold

applied acrylic


Finished Products — Lifetime Limited


(30 year commercial)

inches

To complete your order, this document must be signed and faxed to the Aquatic Centralized Customer Service Center.

Please indicate changes needed.

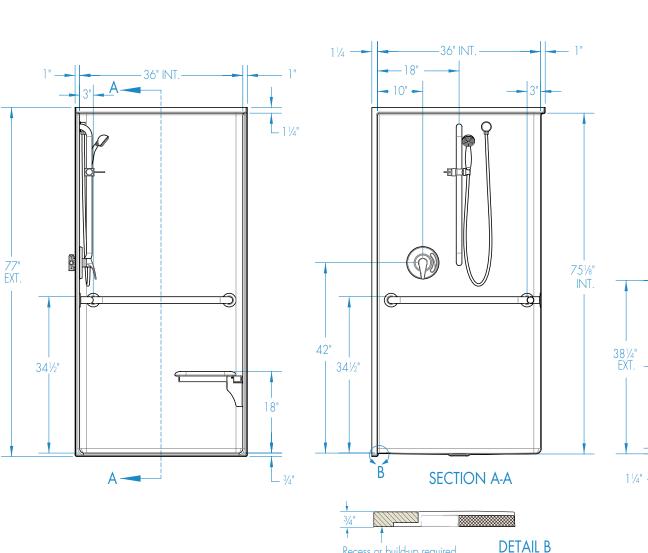




FRAMING DIMENSIONS inches

Туре	D Depth	W Width	Α	В	С
Alcove	38 1/4	38 1/8	Box Out	19	19

- Installation Options:
 1. Install in a recessed pit for rough-in floor installation.
 2. Build sub-floor to level finished floor with top of shower threshold.



Shell tolerance: ± 0 , -3/8" All other tolerances: ± 1 "

Recess or build-up required