

# POINT ARENA

ESTATE SERIES

60 x 60 x 24 ¾

WHIRLPOOL MODEL #W6060DC

AIR-WHIRLPOOL MODEL #W24LUX6060



## FEATURES ~

- Deep, ergonomic bathing well
- Sculpted armrests
- Integral clear acrylic grab bar (1)
- Pre-leveled ABS support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty



## AVAILABLE SYSTEMS

### WHIRLPOOL

- Electronic control
- 9 hydrotherapy jets
  - 3-jet back, shoulder and neck massage system (dual port, spinning)
  - Leg and foot jets
- Whirlpool pump

### AIR-WHIRLPOOL COMBINATION


- Whirlpool system, plus:
- Perimeter air system
- Variable speed heated-air blower with purge and dry cycle
- Electronic wave and pulse modes
- 1.5kW inline maintenance heater



# POINT ARENA

60 x 60 x 24 3/4

BASE MODEL	PKG. WT. LBS.	JETS	DRAIN	MODEL #	MSLP
<input type="checkbox"/> Whirlpool	271	9	Center Front	W6060DC	\$4,857
<input type="checkbox"/> Air-Whirlpool	300	9	Center Front	W24LUX6060	\$6,353



## ESTATE

### PRODUCT FEATURES

- Two person bath
- Acrylic grab bar
- Sculpted armrests

### ILLUSTRATION KEY

#### AIR-WHIRLPOOL MODELS

- P** = Pump Location  
**B** = Blower Location

#### WHIRLPOOL ONLY MODELS

- P** = Pump Location

OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): White (WH)		No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)		\$35
Cast acrylic premium color upgrade (COLUxx): Black (BK) Sterling Silver (ST)		\$389
Metallic trim finish: Chrome (MTCH)		\$315
Metallic trim finish (MTxx): Polished Brass (BR) Brushed Nickel (SN)		\$390
Magnetic pillow (MPxxxxx): White (WHPIL) Black (BKPIL)		\$105
Cable drive waste & overflow: Chrome (CDCHCD)		\$345
Cable drive waste & overflow, color-matched (CDxxxx): Biscuit (BICD) White (WHCD)		\$390
Cable drive waste & overflow (CDxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)		\$440
Chromatherapy, installed (CLM1)		\$335
Inline heater - 1.5kW, factory installed (whirlpool only) (HTH1)		\$400
Wood shipping crate (PKCR)		\$460
Rush order program* (DELQK)		\$325
Quick ship program* (whirlpool only) (DELSN)		No charge
Residential delivery* (DELRD)		\$205
Residential delivery with lift gate* (DELLG)		\$454

\*For program terms and conditions, see page iii.

**BASE PRICE** (insert MSLP of base model selected in upper table)

+ \$ \_\_\_\_\_

**OPTIONS SUB TOTAL**

\$ \_\_\_\_\_

**ORDER TOTAL**

= \$ \_\_\_\_\_

### ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cast Acrylic stock color ((COLxx)) ← **part number**


**option code** → White (WH)

**Example:** COLxx + WH = COLWH  
 Cast Acrylic stock color in White

Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.


Customer Name: \_\_\_\_\_ Date: \_\_\_\_\_

Additional Information: \_\_\_\_\_

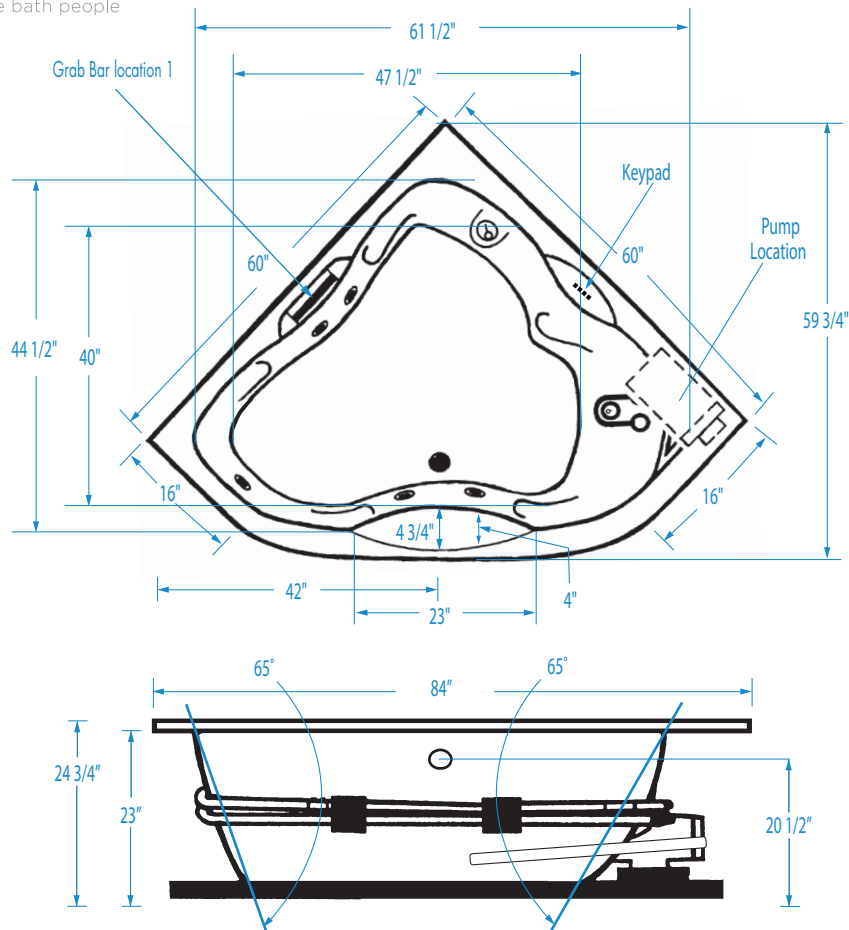


## POINT ARENA

60 x 60 x 24 3/4 inches



Note: For Air-whirlpool, no alternate pump/blower location available.



**FEATURES** lbs (kg) Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Whirlpool #W6060DC	Cast Acrylic	9	102 GPM	—	—	1.5 kw Inline (optional)	Electronic	Center Front	271
Air-Whirlpool #W24LUX6060	Cast Acrylic	9	102 GPM	Channel	Variable speed	1.5 kw Inline	Electronic	Center Front	300

### DIMENSIONS inches

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
60	60	24 3/4 / 23 (585)	—

### SUMP DATA inches

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
115	96	61 1/2	47 1/2	44 1/2	40

### PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
6 3/4	14	2 / 1 1/8

### ELECTRICAL DATA

Component	Specification	Requirement
Pump	9 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Inline Heater	1.5 kW; 12 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Blower	1.0 HP; 9.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

#### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 minimum access required at pump/blower location(s).

3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

#### NOTE:

1) This whirlpool must be hard wired to the breaker box. Three outlets will be supplied on the air-whirlpool.