


# TWO-HANDLE WIDESPREAD LAVATORY FAUCET WITH BRASS SPOUT




#### **MODEL NUMBER:**

☐ 2064.831 Serin Widespread

Metal Speed Connect® Pop-up drain.

Metal Lever handles.

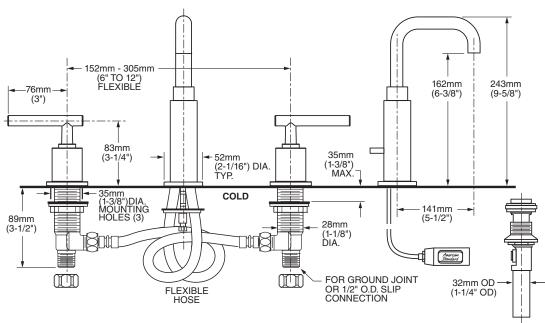

### **GENERAL DESCRIPTION:**

Cast brass valve bodies with flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. Brass spout. One-half inch male inlet shanks with brass coupling nuts. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect® drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

## **PRODUCT FEATURES:**

**Brass Construction:** Durable. Ideal for prolonged contact with water. Provides the finest surface for application of colors and finishes.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

#### **Exclusive Speed Connect Metal Drain:**

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

**Choice of Finishes:** Available in Polished Chrome or Satin Nickel (PVD).

#### SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model #2064.831.\_\_\_\_.




# TWO-HANDLE WIDESPREAD LAVATORY FAUCET WITH BRASS SPOUT

# **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B 125 NSF 61/Section 9 and Annex G



	Description	Finish Options	
Product Number		Polished Chrome	Satin Nickel (PVD)
		002	295
2064.831	Serin Widespread with Metal Speed Connect® Pop-up drain. Metal Lever handles.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.