




# SELECTRONIC® SENSOR-OPERATED URINAL FLUSH VALVE, 0.5 GPF HARD-WIRED AC POWERED

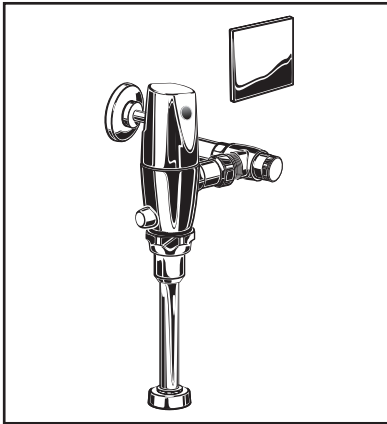

## GENERAL DESCRIPTION:

Exposed, sensor-operated Selectronic® Urinal Flush Valve for 3/4" top spud urinals, 0.5 gpf. Hard-Wired AC powered.

Inlet includes 3/4" sweat solder kit and angle stop with back flow protection and vandal-resistant cap.

Outlet includes 3/4" high back pressure vacuum breaker with spud coupling and flange.

## PRODUCT FEATURES:

- **Universal Input Voltage:** 100-240 VAC, 50/60 Hz
- **Optional Chrome Cover Plate:** Only required if AC transformer must be installed from the front
- **Pressure Compensation** feature ensures accurate flush volume regardless of inlet water pressure
- **Self-Cleaning Piston** with integral wiper spring significantly reduces clogging and maintenance
- **Selectronic® Proximity System** with universal sensor provides hygienic, "hands free" operation
- **State-of-the-Art Electronics** prevent ghost flushing
- **Dezincification Resistant** semi-red brass alloy
- **Fully Mechanical Manual Override Button** can flush the valve without power
- **Fail-Safe:** Valve automatically closes upon loss of power or water pressure and does not need to be reset
- **Adjustable Sanitary Flush** cleans the fixture & maintains the trap seal.
- **Stadium Feature:** Valve automatically switches to water savings mode during periods of heavy usage
- **Chemical Resistant EPDM Seals** for extended life
- **High Back Pressure Vacuum Breaker**
- **Adjustable Tailpiece**
- **Range can be adjusted manually or with optional remote control**
- **No external volume adjustment.**
- **Can be installed left or right handed**

## RECOMMENDED SPECIFICATION:

Electronic, sensor activated urinal flush valve shall feature self-cleaning piston valve with integral wiper spring in refill orifice to prevent clogging. Powered by Class 2 UL certified hard-wired AC transformer with universal input voltage of 100 - 240 VAC, 50/60 HZ. Includes a fully mechanical manual override that can flush the valve without power. Includes semi-red brass valve body and metal cover with chrome finish. Includes angle stop with back-flow protection & vandal-resistant cap. Sweat solder kit and high back pressure vacuum breaker also included. 0.5 gpf / 1.0 Lpf flush valve shall be American Standard Model # 606\_.051.002.

## MODEL NUMBER:

- ☐ **6062.051 HARD-WIRED AC POWERED:**  
Includes Class 2 UL certified universal hard-wired AC transformer (electrical box by others).
- ☐ **6061.051.002 MULTI-AC POWERED:**  
Includes 10' extension cable and Y-connector.  
One transformer can power up to 15 faucets and/or flush valves in a daisy chain configuration.  
**TRANSFORMER NOT INCLUDED.**

## OPERATING PRESSURE:

Overall Range: 20-125 psi\*\*

Recommended: 20 psi (flowing)-80 psi (static)


\*\* Water pressure over 80 psi is not recommended for most plumbing fixtures.

## FLOW REQUIREMENT:

10 gpm (37.9 L/min.)

## OPTIONAL ACCESSORIES:

- Cast wall flange with set screw (6065816.002)
- 12-1/2" long vacuum breaker (M964446-0020A)  
- 4" longer than standard

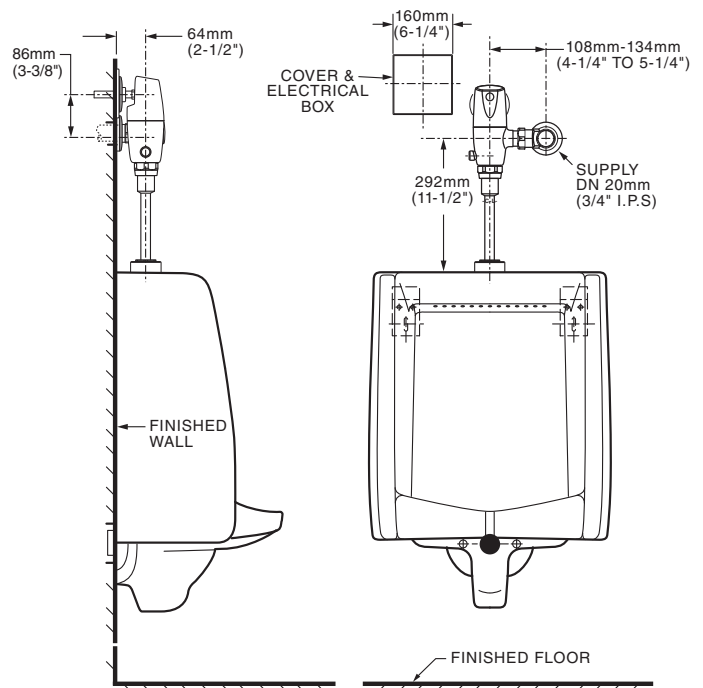

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES


# SELECTRONIC® SENSOR-OPERATED URNIAL FLUSH VALVE, 0.5 GPF HARD-WIRED AC POWERED

## LISTINGS:

- ASSE 1037
- ANSI/ASME A112.19.2
- ADA Compliant

**CAUTION:** Use only American Standard supplied transformers and cable sets. Using non-AS supplied cables, or cutting, splicing or modifying any components will void the warranty.

## Roughing-in Dimensions

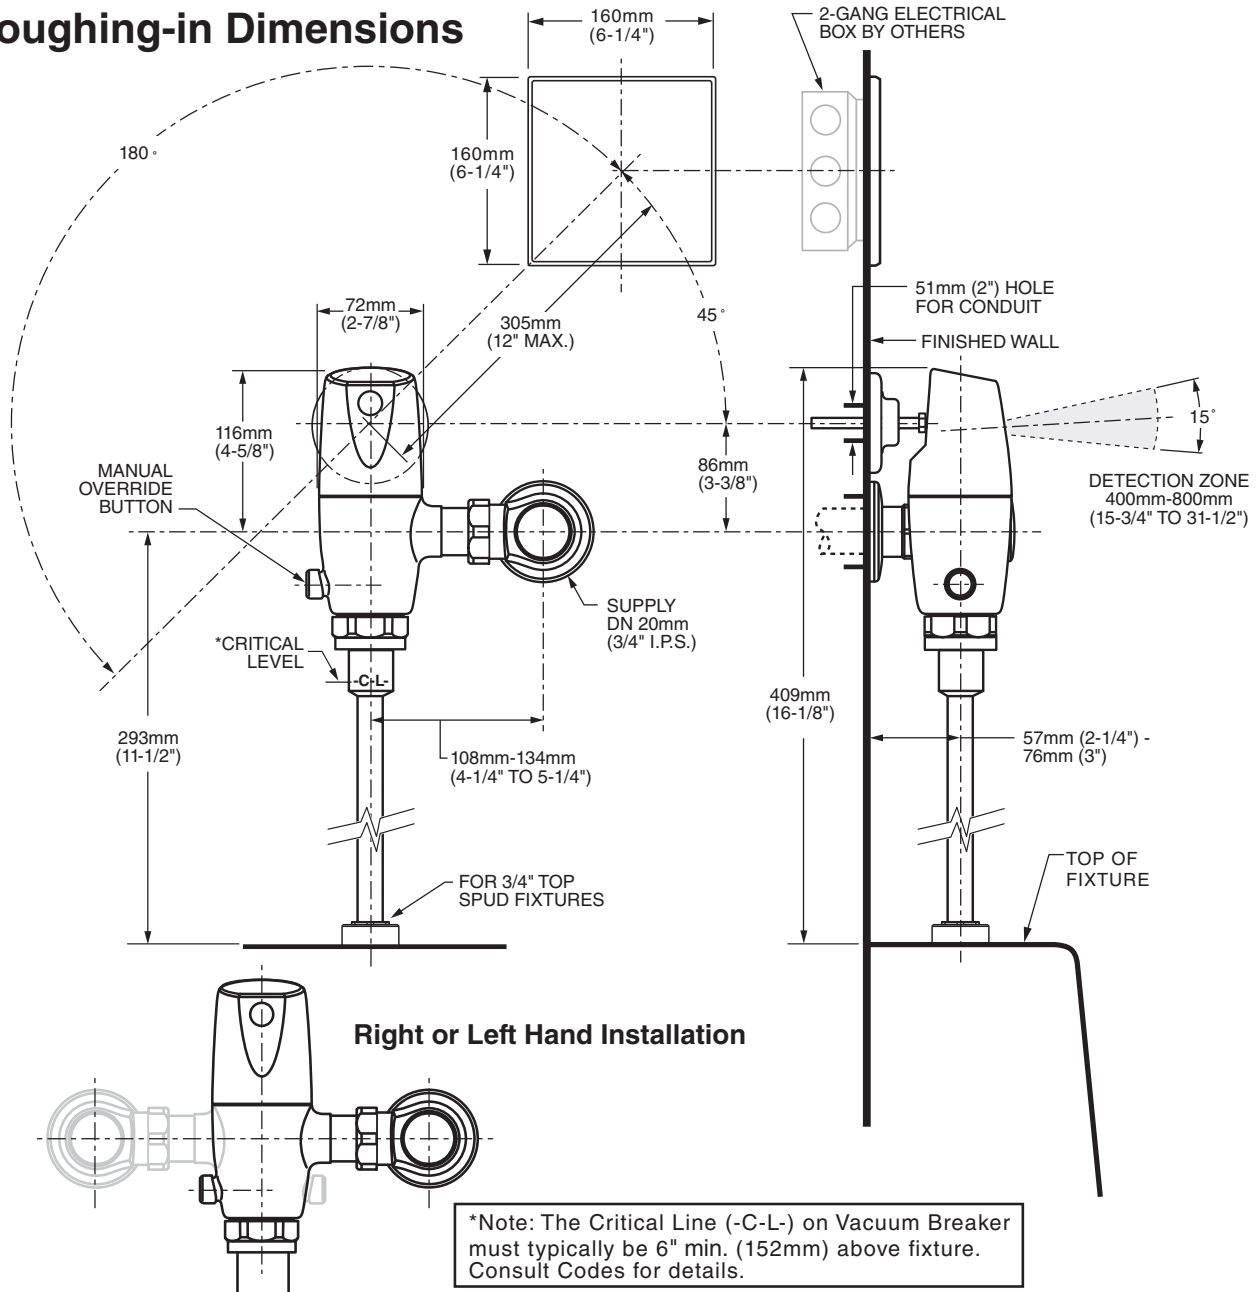

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES