




MONTERREY™ TWO-HANDLE TOP-MOUNT KITCHEN FAUCET WITH LAMINAR FLOW IN BASE OF SPOUT RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

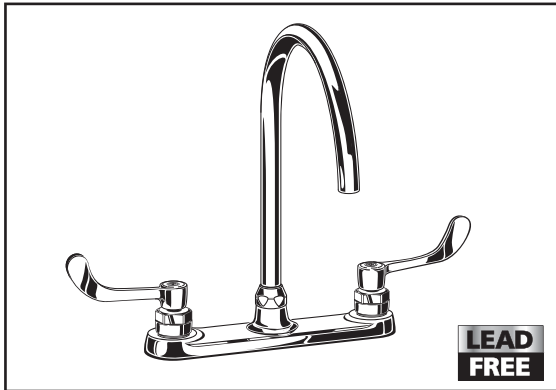


6409.180 Shown

MODEL NUMBER:

6409.180 Top Mount Faucet with 8" Gooseneck Spout & Laminar Flow in Spout Base

Field-convertible rigid / swivel gooseneck spout. Vandal-resistant metal wrist blade handles with red/blue indexes. 1.5 gpm pressure compensating laminar flow device in the base of the spout. Plain spout end.

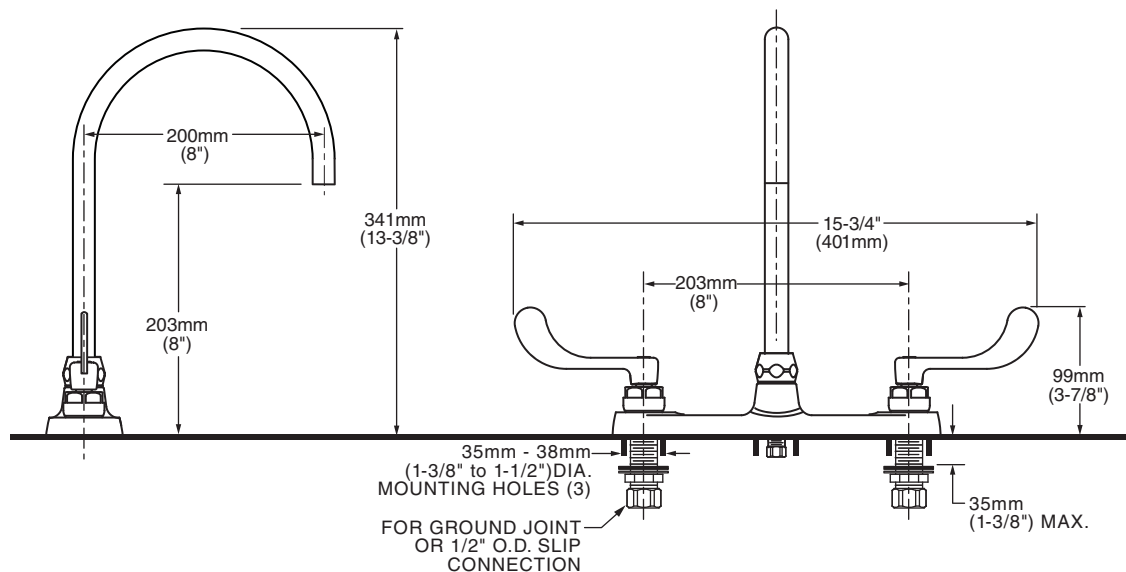

GENERAL DESCRIPTION:

Durable cast brass construction. Field-convertible rigid-swivel gooseneck spout with 8" reach. Plain spout end. 1/4 turn ceramic disc valve cartridges. 1/2" male threaded inlet shanks with brass shank nuts and coupling nuts. Vandal-resistant wrist blade handles with blue & red color indexes. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Laminar Flow in Spout Base: Ideal for hospital applications. Eliminates the mix of air & water.

Plain Spout End: Nothing on the end of the spout to collect lime & debris.

Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Field-Convertible Rigid / Swivel Gooseneck Spout

Solid Brass Construction: Durable. Excellent in high use applications. Ideal for prolonged contact with water.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

5 Year Warranty: 5 year limited warranty for commercial installations.

SUGGESTED SPECIFICATION:

Two handle top-mount kitchen faucet shall feature cast brass construction with all brass coupling nuts. Shall feature water-conserving 1.5gpm/5.7L/min. pressure compensating laminar flow device in base of spout. Shall also feature brass, field-convertible gooseneck spout with 8" reach and plain spout end. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model #6409.180.002.




MONTERREY™ TWO-HANDLE TOP-MOUNT KITCHEN FAUCET WITH LAMINAR FLOW IN BASE OF SPOUT RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B 125
NSF 61/Section 9, Annex G
CALGreen

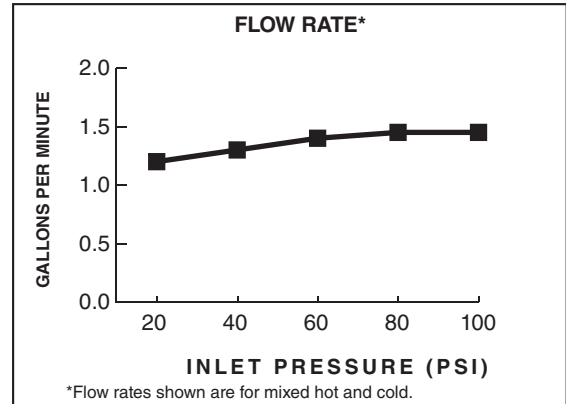

Product Number	Description	Finish
		Polished Chrome
		002
6409.180	Top mount faucet with field-convertible 8" rigid / swivel spout. VR wrist blade handles. 1.5 gpm pressure compensating laminar flow device in the base of the spout. Plain spout end.	

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet