




**6501.170 Shown**

**MODEL NUMBER:**

- ☐ **6500.170 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Wrist Blade handles. Less drain and pop-up hole.
- ☐ **6501.170 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Wrist Blade handles. Pop-up drain.
- ☐ **6502.170 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Wrist Blade handles. Grid strainer drain.
- ☐ **6500.140 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Lever handles. Less drain and pop-up hole.
- ☐ **6501.140 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Lever handles. Pop-up drain.
- ☐ **6502.140 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Lever handles. Grid strainer drain.

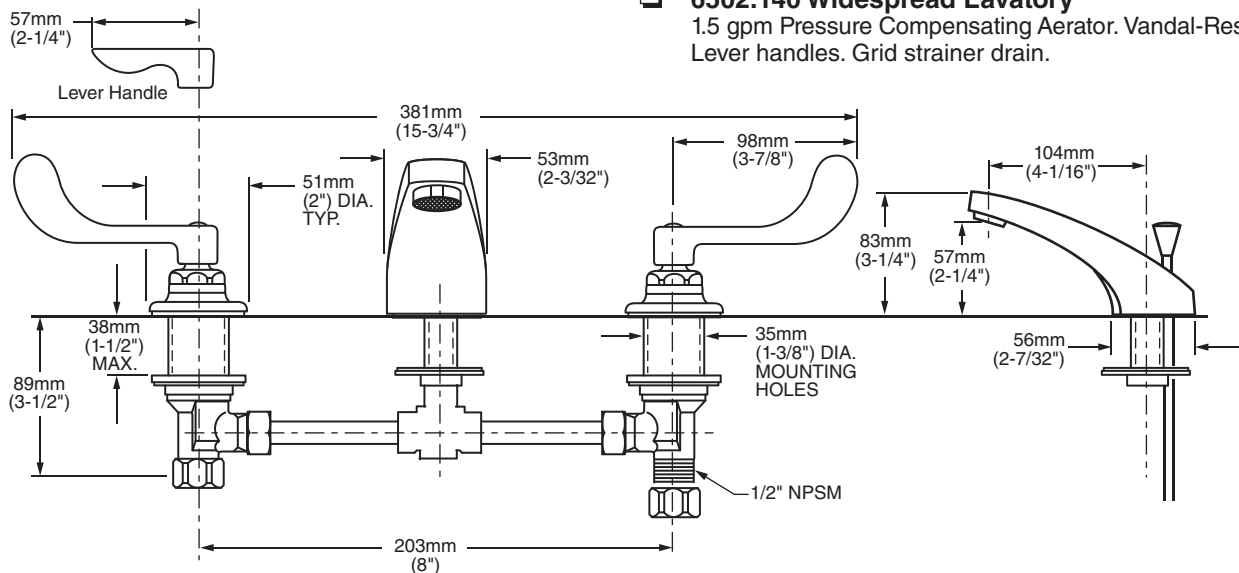

**GENERAL DESCRIPTION:**

Durable cast brass construction throughout. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Wrist Blade or Lever handles with blue & red color indexes. All brass drain bodies with 1-1/4" (32mm) tailpieces (on applicable models). 1.5 gpm/5.7L/min. maximum flow rate. Vandal-Resistant and Laminar Flow aerators are available.

**PRODUCT FEATURES:**

**Pressure Compensating Aerator:** Provides a constant water flow of 1.5 gpm throughout the pressure range

**Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.


**SUGGESTED SPECIFICATION:**

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 650\_\_\_\_.002.

## CODES AND STANDARDS

These products meet or exceed the following codes and standards:

**ASME A112.18.1**  
**CSA B 125**  
**NSF 61/Section 9 and Annex G**

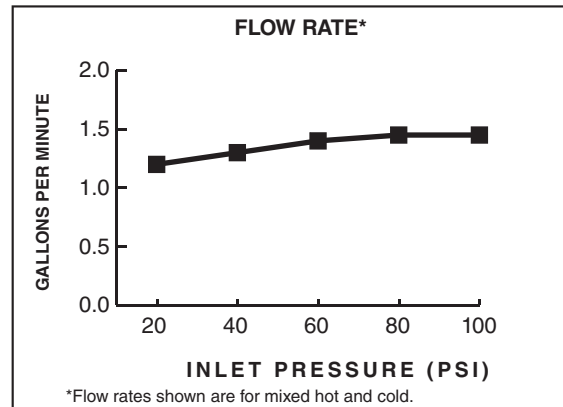

| Product Number | Description  | Finish          |
|----------------|--|-----------------|
|                |  | Polished Chrome |
|                |  | 002             |
| 6500.170       | Widespread Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole. |                 |
| 6501.170       | Widespread Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Pop-up drain.               |                 |
| 6502.170       | Widespread Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.        |                 |
| 6500.140       | Widespread Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Less drain and pop-up hole.       |                 |
| 6501.140       | Widespread Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Pop-up drain.                     |                 |
| 6502.140       | Widespread Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Grid strainer drain.              |                 |



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES

### Other Aerators Available:

| Part Suffix | Description   |
|-------------|---|
| LV22        | 2.2 gpm (8.3 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet                |
| V22         | 2.2 gpm (8.3 Lpm) Vandal-Resistant Aerator  |
| A15LV       | Anti-Microbial 1.5 gpm (5.7 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet |
| LV15        | 1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet            |
| V15         | .5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator                                     |
| LV10        | 1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet            |
| V10         | 1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator                                    |
| V05         | 0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Non-Aerated Spray                          |
| V035**      | 0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Non-Aerated Spray                         |

\*PCA - Pressure Compensating

\*\*Meets Cal Green Code