

HERITAGE/AMARILIS

SINGLE-HANDLE PANTRY/BAR SINK FAUCET

WITH BRASS GOOSENECK SPOUT

MODEL NUMBER:






☐ 7100.271H Pantry/Bar Sink Faucet Gooseneck swivel spout. Brass wrist blade handle.



7100.271H Shown

LEAD FREE

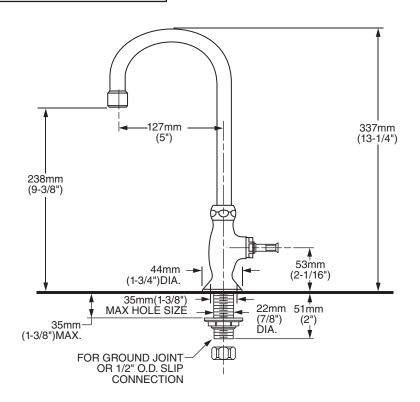

GENERAL DESCRIPTION:

Durable brass construction. Amarilis 1/4 trun washerless ceramic disc valve cartridge. One-half inch male inlet shank with brass coupling nut and shank nut. Choice of wrist blade or lever handle. Brass gooseneck swivel spout. 2.2gpm/8.3L/min. maximum flow rate. For cold or tempered water.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:

Single handle pantry/bar sink faucet shall feature cast brass construction. Shall feature all brass shank nut and coupling nut. Shall also feature 1/4 turn washerless ceramic disc valve cartridge. Faucet shall be American Standard Model # 7100.

© 2013 AS America Inc. Revised 12/13



HERITAGE/AMARILIS


SINGLE-HANDLE PANTRY/BAR SINK FAUCET

WITH BRASS GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9 **NSF 372**



| | | | Finish |
|---|-----------|--|--------------------|
| | Product | | Polished Chrome |
| | Number | Description | 002 |
| E | 7100.241H | Pantry/Bar faucet. Metal Lever handle. | |
| Ł | 7100.271H | Pantry/Bar faucet. Brass Wrist Blade handle. | |



| Other Aerators Available: | | | |
|---------------------------|--|--|--|
| Part Suffix | Description | | |
| LV15 | 1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet | | |
| L15 | 1.5 gpm (5.7 Lpm) PCA Non-Aerated Laminar Flow Outlet | | |
| V15 | 1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator | | |
| LV10 | 1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet | | |
| L10 | 1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet | | |
| V10 | 1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator | | |
| V05 | 0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Non-Aerated Spray | | |
| V035 | 0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray | | |

*PCA - Pressure Compensating All modifications meet CALGreen Code

L146 © 2013 AS America Inc. Revised 12/13