
Emerican Standard

BERWICK® TWO-HANDLE WIDESPREAD LAVATORY FAUCET

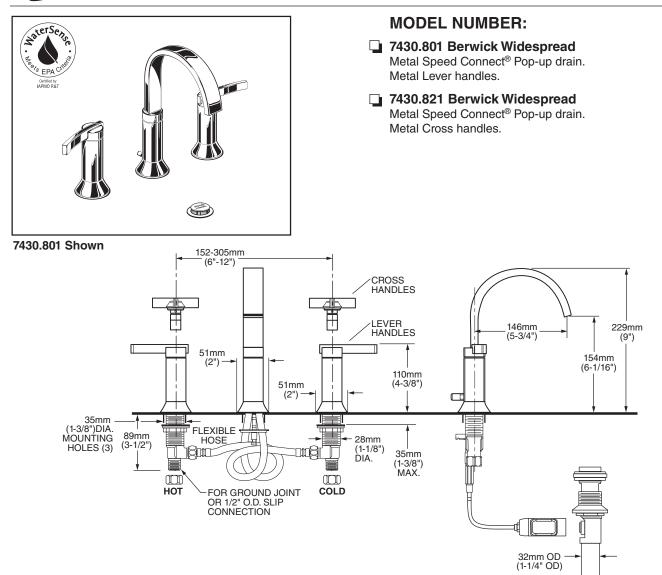

GENERAL DESCRIPTION:

Cast brass valve bodies with flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. Brass spout. Choice of metal lever or metal cross handles. One-half inch male inlet shanks with brass coupling nuts. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect[®] drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Ideal for prolonged contact with water. Provides the finest surface for application of colors and finishes.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Choice of Finishes: Available in Polished Chrome or Satin Nickel (PVD).

SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model #7430.____.


American Standard

BERWICK® TWO-HANDLE WIDESPREAD LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 NSF 61/Section 9 and Annex G CSA B125.1

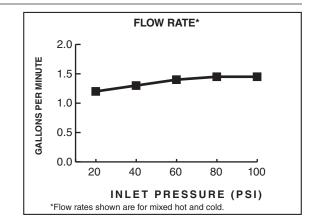

			Finish Options	
	Product		Polished Chrome	Satin Nickel (PVD)
Ŀ	Number	Description	002	295
	7430.801	Berwick Widespread with Metal Speed Connect $^{\ensuremath{^{\otimes}}}$ Pop-up drain. Metal Lever handles.		
	7430.821	Berwick Widespread with Metal Speed Connect® Pop-up drain. Metal Cross handles.		

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

£