



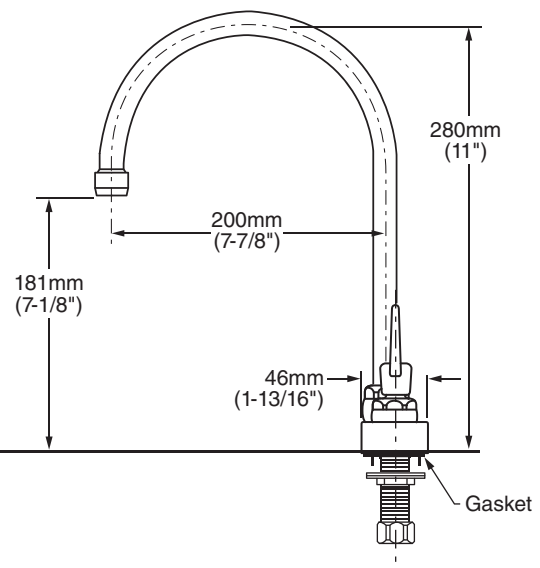

7500.178 Shown

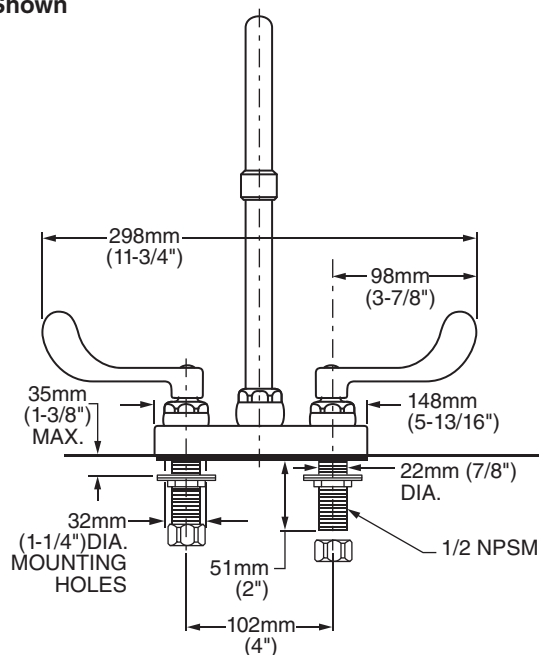

## GENERAL DESCRIPTION:

Durable cast brass construction. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Convertible rigid/swivel spout with 8" reach. Vandal-Resistant Wrist Blade handles with blue & red color indexes. Vandal-Resistant and Laminar Flow aerators are available.

## PRODUCT FEATURES:

**Pressure Compensating Outlets:** Provides a constant water flow throughout the pressure range.

**Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Field-Convertible Rigid/Swivel Spout with 8" Reach:** Easily converted in the field.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

## SUGGESTED SPECIFICATION:

Two handle centerpiece lavatory faucet shall feature cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving pressure compensating flow outlets. Vandal-Resistant wrist blade handles. 1/4 turn washerless ceramic disc valve cartridges. Shall also feature convertible rigid/swivel spout with 8" reach. Fitting shall be American Standard Model # 7500.17\_.002.




# MONTERREY™

## TWO-HANDLE CENTERSET LAVATORY FAUCET RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

### CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1  
CSA B 125  
NSF 61/Section 9 and Annex G  
NSF 372

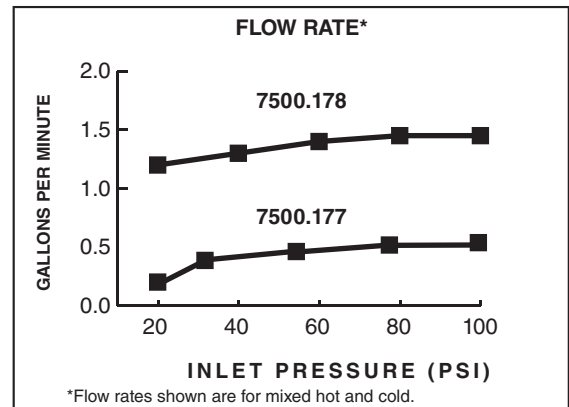

Product Number	Description	Finish
		Polished Chrome
		002
7500.177	Centerset lavatory faucet with field-convertible gooseneck spout with 8" reach. 0.5 gpm/1.9 L/min pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. Less drain & pop-up hole.	
7500.178	Centerset lavatory faucet with field-convertible gooseneck spout with 8" reach. 1.5 gpm/5.7 L/min pressure compensating non-aerated spray. Vandal-resistant wrist blade handles. Grid strainer drain.	



### Other Aerators Available:

Part Suffix	Description
L22	2.2 gpm (8.3 Lpm) Non-Aerated Laminar Flow Outlet
A15LV	Anti-Microbial 1.5 gpm (5.7 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Multi-Laminar Spray

\*PCA - Pressure Compensating

\*\*Meets Cal Green Code