




MONTERREY™ TWO-HANDLE CENTERSET LAVATORY FAUCET WITH LAMINAR FLOW IN BASE OF SPOUT RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH



7500.180 Shown

MODEL NUMBER:*

- 7500.180 Centerset Lavatory
1.5 gpm Pressure Compensating Laminar Flow device in base of spout. Field-Convertible rigid/swivel gooseneck spout. Plain spout end. Vandal-Resistant Wrist Blade handles. Less drain and pop-up hole.

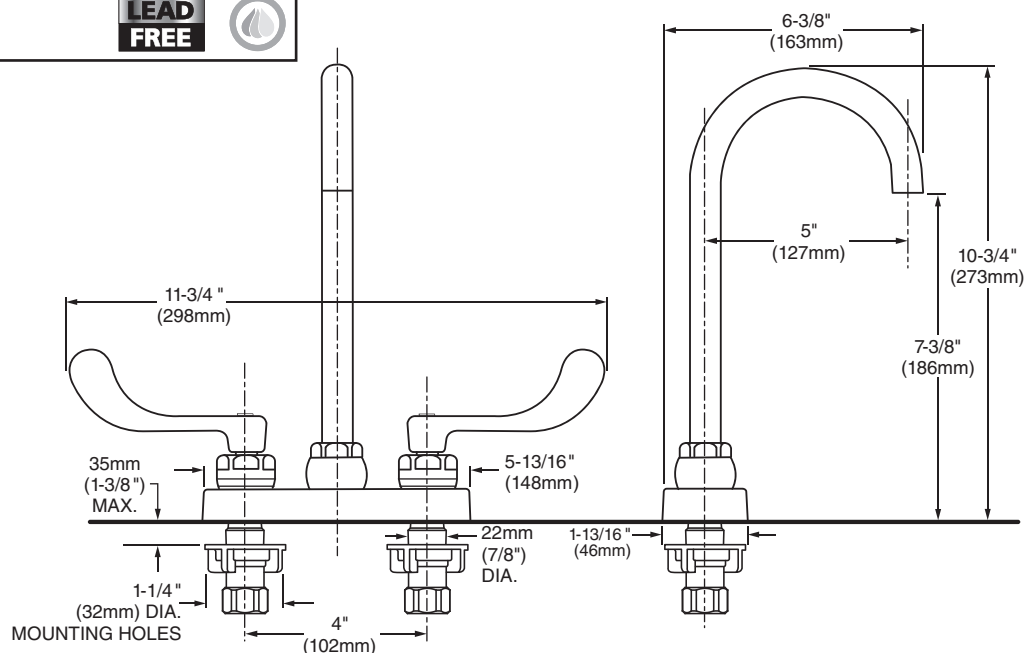

GENERAL DESCRIPTION:

Durable cast brass construction. 1/2" male threaded inlet shanks with brass shank nuts and coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-Convertible rigid/swivel spout. Plain spout end. Vandal-Resistant Wrist Blade with blue & red color indexes. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Laminar Flow Device in Base of Spout: Ideal for hospital applications.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Field-Convertible Rigid/Swivel Spout: Easily converted in the field.

Low Lead: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION:

4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating laminar flow device in base of spout. Vandal-Resistant wrist blade handles. 1/4 turn washerless ceramic disc valve cartridges. Shall also feature field-convertible rigid/swivel spout with plain spout end. Fitting shall be American Standard Model # 7500.180.002.




MONTERREY™ TWO-HANDLE CENTERSET LAVATORY FAUCET WITH LAMINAR FLOW IN BASE OF SPOUT RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI 117.1
ASME A112.18.1
CSA B 125
NSF 61/Section 9 and Annex G

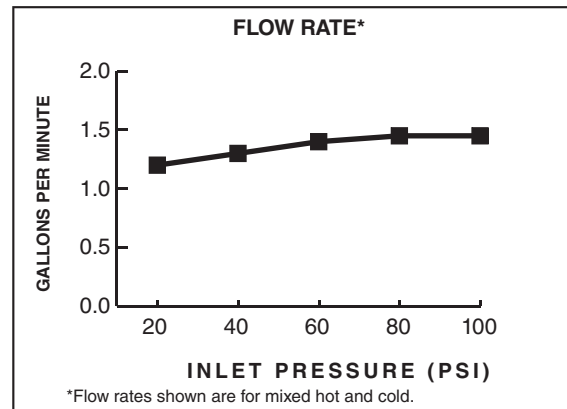

Product Number	Description	Finish
		Polished Chrome
		002
7500.180	Centerset Lavatory with field-convertible rigid/swivel gooseneck spout. 1.5 gpm/5.7L/min pressure compensating laminar flow device in base of spout. Plain spout end. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet