

# ProMax®



## ATMOSPHERIC VENT

### INTELLIGENT CONTROL LOGIC\*

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance.
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source.
- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics.
- \*Not available on 60,000 BTU input models (GCRX-50 and GCRX-55).

### GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J.

### DYNACLEAN™ DIFFUSER DIP TUBE

- Reduces lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

### COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

### PUSH-BUTTON PIEZO IGNITOR

- Makes lighting the pilot fast and easy with one-hand push-button spark ignition.

### HEAT TRAP NIPPLES

- Factory-installed for faster installation.

### BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

### ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a 1/4 turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

### CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IESNA 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act, (EPCA), as amended.

### HIGH ENERGY FACTORS

- Eco-Friendly non-CFC foam insulation, external heat traps and specially designed combustion chamber combine to produce a high Energy Factor for maximum savings on operating costs.

### CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

### MAXIMUM HYDROSTATIC WORKING PRESSURE 150 PSI

### DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters.


### 6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to [hotwater.com](http://hotwater.com)



Model Number	Gallon Capacity	First Hour Rating Gallon	Energy Factor	BTU Input Natural Gas	BTU Input Propane Gas	Recovery 90°F Rise Gallon Per Hour	Dimensions in Inches								Approx. Shipping Weight (lbs)	
							A	B	C	D	E	F	*G	*H		Draft Hood
<b>Tall Models</b>																
†GCB-30	30	64	0.63	35,500	32,000	37	61-1/2	58	16	12-1/4	8	51-3/4	N/A	N/A	3 or 4	123
GCR-30	30	67	0.63	35,500	32,000	37	61-1/2	58	18	12-1/4	8	51-3/4	N/A	N/A	3 or 4	132
‡GCRH-40	40	67	0.62	35,500	N/A	38	61-3/4	58-1/4	20	12-1/4	8	52	N/A	N/A	3 or 4	138
†GCB-40	40	70	0.62	40,000	36,000	42	61-3/4	58-1/4	18	12-1/4	8	52	N/A	N/A	3 or 4	130
GCR-40*	40	70	0.62	40,000	36,000	42	61-3/4	58-1/4	20	12-1/4	8	52	14-1/4	51-3/4	3 or 4	138
GCG-50*	50	88	0.60	40,000	37,000	41	60-3/4	57-1/4	21	12-1/4	8	50 1/2	14-1/4	50-1/2	3 or 4	148
GCR-50*	50	88	0.62	40,000	37,000	43	60-3/4	57-1/4	22	12-1/4	8	50-1/2	14-1/4	50-1/2	3 or 4	165
GCRT-50*	50	92	0.60	50,000	45,000	54	60-3/4	57-1/4	22	12-1/4	8	50-1/2	14-1/4	50-1/2	4	165
†GCRX-50*	50	98	0.60	60,000	54,000	65	65-1/2	61	22	13-1/2	8	54-1/4	14-1/4	54-1/4	4	182
GCRX-55*	55	106	0.59	60,000	54,000	65	59-3/4	55-1/4	24	13-1/2	8	48	14-1/4	48	4	185
<b>Short Models</b>																
†GCBL-30	30	56	0.63	35,500	32,000	37	50	46-1/2	18	12	8	40	N/A	N/A	3 or 4	110
GCRL-30	30	62	0.63	35,500	32,000	37	50	46-1/2	20	12	8	40	N/A	N/A	3 or 4	118
†GCBL-40	40	67	0.62	40,000	36,000	41	51-1/2	48	20	12	8	41-1/4	N/A	N/A	3 or 4	134
GCRL-40	40	68	0.62	40,000	36,000	41	51-1/2	48	22	12	8	41-1/4	N/A	N/A	3 or 4	135
GCRL-50	50	93	0.60	40,000	40,000	43	53-1/4	49-3/4	24	12	8	41-3/8	N/A	N/A	3 or 4	177

Recovery capacities based on actual performance tests.  
 Water connection is 3/4" on all models  
 †Models ship with supplied insulation blanket.  
 For 10-year tank and 6-year parts warranty, change "G" to "X" in model number (example: XCR-30).  
 ‡ LP models not available on GCRH-40.  
 \*For optional side-mounted recirculating taps, add "L" to the suffix (example: GCR-40L).  
 All models approved for installation from sea level to 10,100 ft. elevation.  
 Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

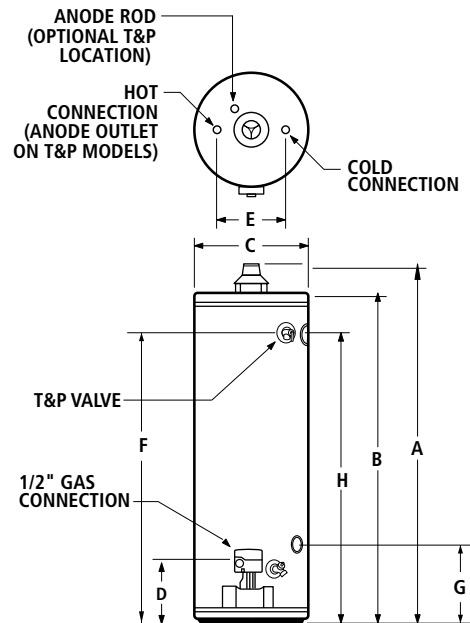

Maximum Hydrostatic Working Pressure: 150 PSI

For technical information call 800-527-1953. A. O. Smith Corporation reserves the right to make product changes or improvements without prior notice.