


Copper Brute II

Boiler & Water Heater

BWCH Hydronic Heater
BWCV Volume Water Heater
Indoor/Outdoor Sizes 500-2000

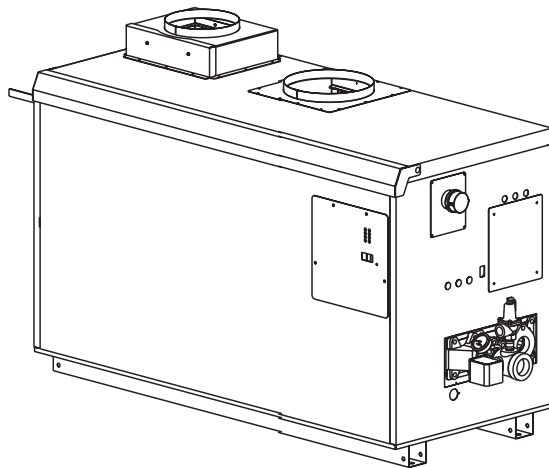

Date:

Project #:

Engineer:

Prepared By:

Bid Date:



Submittal Data

Project Name:

Location:

Contractor:

Standard Equipment

- ASME 160 psi working pressure heat exchanger
- ASME "H" stamp
- Firing rates:
Two-stage (500-750)
Three-stage (1000)
Four-stage (1250-2000)
- Flanged water connections
- Glass-lined headers
- External header gaskets
- 75 psi (517 kPa) ASME rated pressure relief valve (BWCH)
- 125 psi (861 kPa) ASME rated pressure relief valve (BWCV)
- Flow switch
- Multiple operating gas valve/pressure regulators
- Temperature pressure gauge
- Manual "A" gas valve
- Intake air filter
- Multiple, removable burner trays
- Stainless steel burners
- Built-in draft fan for Category I or III vent systems
- Air pressure switch
- Burner site glass
- 24V control system
- 115/24VAC transformer
- Manual reset high limit
- Automatic reset high limit
- Electronic PID staging control with LCD and touchpad
- PC board for electrical connections
- External controller connections with selector switch
- Hot surface ignition
- On/Off toggle switch
- Pump time delay
- Diagnostic lights
- Less than 10 ppm NOx

Boiler Data

Model:

- ☐ Boiler BWCH
☐ Water Heater BWCV

Number of Units:

Fuel

- ☐ Natural
☐ Propane

Heat Exchanger

- ☐ Copper
☐ Cupro-Nickel
☐ Copper, Reversed
☐ Cupro-Nickel, Reversed

Water Trim

- ☐ Glass-Lined Cast Iron
☐ Bronze Trim (std. on BWCV)

Options

- ☐ CSD-1
☐ 200°F Max Controls (std. on BWCV)
☐ Low Water Cutoff
☐ ASME "HLW" Stamp (BWCV only)



Sizing Data

	Size	Input ¹ MBH	Input ¹ kW	Output ¹ MBH	Output ¹ kW	Gas Conn. Size inches ²	Water Conn Size inches ²	Shipping Weight lbs	kg
	500	500.0	147	425	125	1¼	2	440	200
	750	750.0	220	638	187	1¼	2	520	236
	1000	999.0	293	849	249	1½	2½	630	286
	1250	1250.0	366	1064	312	2	2½	675	306
	1500	1500.0	440	1266	371	2	2½	775	352
	1750	1750.0	513	1489	436	2	2½	823	375
	BWCH 2000	1999.0	586	1701	498	2	2½	970	440
	BWCV 2000	2000.0	586	1701	498	2	2½	970	440

	Size	BWCH Combustion Efficiency%	BWCH Thermal Efficiency%	BWCV Thermal Efficiency%
	500	85.0	85.0	85
	750	85.0	85.0	85
	1000	85.0	85.0	85
	1250	85.1	85.2	85
	1500	85.1	85.2	85
	1750	85.1	85.2	85
	2000	85.1	85.2	85

- NOTES:**
1. Input and output must be derated 4% per 1000 feet above sea level when installed above 2000 feet altitude.
 2. Dimensions are nominal.
 3. For other boiler ratings:
 Boiler Horsepower: $HP = \frac{\text{Output}}{33,475}$ Radiation Surface: $EDR \text{ sq. ft.} = \frac{\text{Output}}{150}$

Water Flow Requirements

BWCH (Boiler)

TEMPERATURE RISE IN DEGREES

	20°F		11°C		25°F		14°C		30°F		17°C		35°F		19°C	
Size	Flow gpm	H/L feet	Flow lpm	H/L m	Flow gpm	H/L feet	Flow lpm	H/L m	Flow gpm	H/L feet	Flow lpm	H/L m	Flow gpm	H/L feet	Flow lpm	H/L m
500	43	1.7	161	0.5	34	1.1	129	0.3	28	0.9	107	0.3	24	0.7	92	0.2
750	64	3.3	241	1.0	51	2.3	193	0.7	43	1.7	161	0.5	36	1.2	138	0.4
1000	85	5.0	321	1.5	68	3.6	257	1.1	57	3.1	214	0.9	49	2.2	184	0.7
1250	106	8.1	401	2.5	85	6.1	322	1.9	71	4.7	269	1.4	61	3.4	231	1.0
1500	128	10.0	483	3.0	102	7.2	386	2.2	85	5.5	322	1.7	73	4.2	276	1.3
1750	N/R	N/R	N/R	N/R	119	10.5	451	3.2	99	8.4	375	2.6	85	5.8	322	1.8
2000	N/R	N/R	N/R	N/R	136	12.5	515	3.8	113	10.4	429	3.2	97	8.3	368	2.5

BWCV (Water Heater)

Size	HARD WATER				NORMAL WATER				SOFT WATER			
	Flow gpm	H/L feet	Flow lpm	H/L m	Flow gpm	H/L feet	Flow lpm	H/L m	Flow gpm	H/L feet	Flow lpm	H/L m
500	90	3.5	341	1.1	68	2.3	257	0.7	45	1.8	170	0.5
750	90	6.0	341	1.8	68	3.0	257	0.9	45	2.1	170	0.6
1000	90	6.1	341	1.9	68	3.6	257	1.1	45	2.3	170	0.7
1250	90	6.3	341	1.9	68	3.8	257	1.2	68	3.8	257	1.2
1500	90	6.5	341	2.0	68	3.9	257	1.2	68	3.9	257	1.2
1750	90	6.7	341	2.0	68	4.0	257	1.2	68	4.0	257	1.2
2000	112	10.0	424	3.0	112	10.0	424	3.0	112	10.0	424	3.0

NOTE: Headloss shown is for the Copper Brute II heat exchanger only.

Recovery Data

WATER TEMPERATURE RISE IN DEGREES

Size	40°F	22°C	50°F	28°C	60°F	33°C	70°F	39°C	80°F	44°C	90°F	50°C	100°F	56°C	120°F	67°C	140°F	78°C
	GPH	L/h	GPH	L/h	GPH	L/h	GPH	L/h	GPH	L/h	GPH	L/h	GPH	L/h	GPH	L/h	GPH	L/h
500	1276	4821	1020	3857	850	3214	729	2755	638	2411	567	2143	510	1929	425	1607	364	1378
750	1913	7232	1531	5786	1276	4821	1093	4133	957	3616	850	3214	765	2893	638	2411	547	2066
1000	2548	9633	2039	7707	1699	6422	1456	5505	1274	4817	1133	4281	1019	3853	849	3211	728	2752
1250	3189	12054	2551	9643	2126	8036	1822	6888	1594	6027	1417	5357	1276	4821	1063	4018	911	3444
1500	3827	14464	3061	11571	2551	9643	2187	8265	1913	7232	1701	6429	1531	5786	1276	4821	1093	4133
1750	4464	16875	3571	13500	2976	11250	2551	9643	2232	8438	1984	7500	1786	6750	1488	5625	1276	4821
2000	5099	19276	4080	15421	3400	12851	2914	11015	2550	9638	2266	8567	2040	7710	1700	6425	1457	5507

NOTE: GPH = gallons per hour, L/h = Liters per hour

Clearances

Appliance Surface	Required Clearance From Combustible Material		Suggested Service Access Clearances	
Left Side	1	2.5	24	61
Right Side	1	2.5	24	61
Top	1	2.5	12	30
Back*	1	2.5	12	30
Front	1	2.5	36	91
Vent	Per venting system supplier's instructions			

Dimensions in **inches** *cm*

*When vent and/or air is connected to the back, 36" (91cm) is suggested.


Electrical Data

Model	Boiler / Heater			Pump Delay Connection Rating			Blower(s)
	Volts	Phase	Amps	Volts	Phase	Amps	
BWCH, BWCV non-pump mounted 500-2000	115	Single	Less than 12	Pilot Duty 24V	Single	Up to 25VA	Included in Copper Brute II connection

Accessories

- ☐ Outdoor reset sensor/housing
- ☐ Vent terminal for outdoor unit
- ☐ Air terminal for outdoor unit
- ☐ Side-wall vent terminal for indoor unit with horizontal venting
- ☐ Side-wall combustion air terminal for indoor unit with horizontal ducted air

Dimensional Data

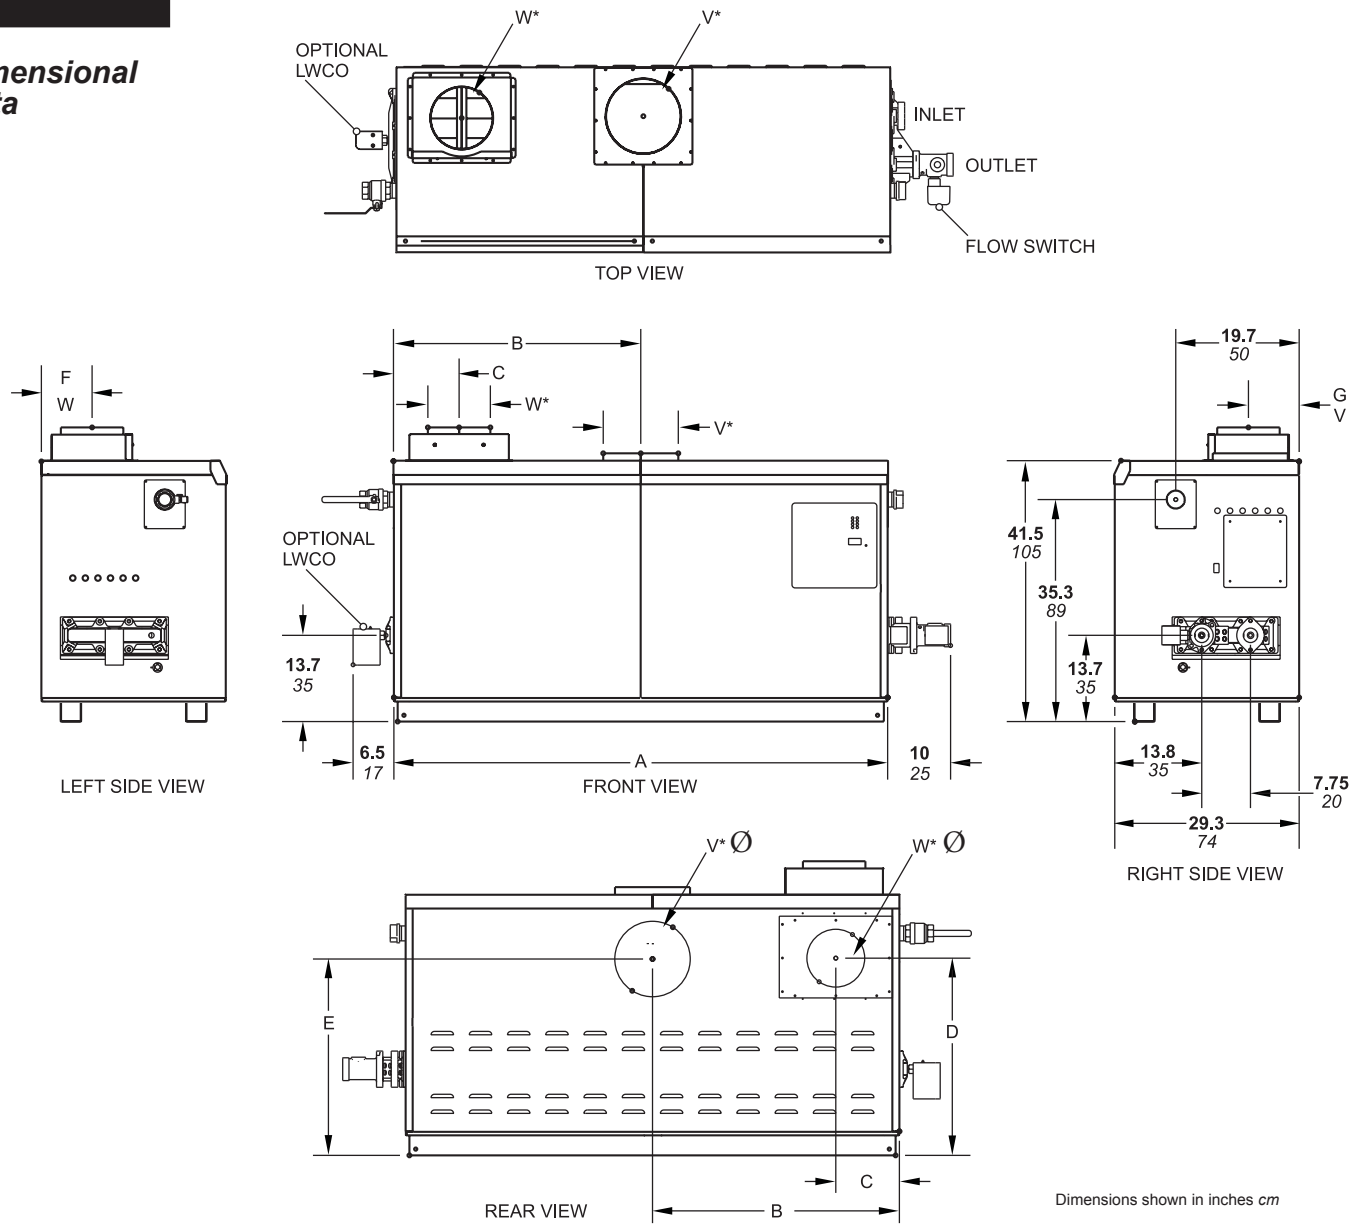

Size	A		B		C		D		E		F		G		H		Air Conn. W*		Vent Conn. V*		Horiz. Vent Pipe	
500	33½	85	15¾	40	5¾	15	29¾	76	33¾	86	7¾	20	8¾	22	46	117	6	15	8	20	6	15
750	45½	116	21¾	55	5¾	15	29¾	76	33¾	86	7¾	20	8¾	22	58	147	8	20	10	25	8	20
1000	57½	146	28¾	73	5¾	15	29¾	76	33¾	86	7¾	20	7	18	70	178	8	20	10	25	8	20
1250	68	172	34	86	10⅞	26	30¾	78	31⅞	79	8¾	22	8¾	22	80	203	12	30	12	30	10	25
1500	78½	199	39¾	101	10⅞	26	30¾	78	31⅞	79	8¾	22	8¾	22	91	231	12	30	12	30	10	25
1750	89	226	44½	113	10⅞	26	30¾	78	31⅞	79	8¾	22	8¾	22	101	256	12	30	14	36	12	30
2000	99½	253	49¾	126	10⅞	26	30¾	78	31⅞	79	8¾	22	8¾	22	112	284	12	30	14	36	12	30

*Air and vent connections may be on top or back of the Copper Brute II, and are field convertible.

Dimensions in inches *cm*

Bradford White reserves the right to change specifications, components, features, or to discontinue products without notice.



200 Lafayette St.
 Middleville, MI 49333
 Warranty: (800) 531-2111

www.BradfordWhite.com

Litho in U.S.A. © Bradford White 1603 Document 1177M-BW