

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

64 Series Compression Reducing Tees

Use: For use with instrumentation, hydraulic, and pneumatic systems. Designed for use with aluminum, copper, and plastic tubing. Not intended for use with steel tubing.


* Plastic tubing requires a plastic insert and sleeve (see 60PT & 63PT submittal forms for details)

Design Features:

- **Little to no tube preparation.** Compression fittings do not require flaring, soldering or other types of tube preparation
- **Available in a broad range of sizes**

Operating Specifications:

Temperature: -65° - 250°F at maximum operating pressures
Working Pressure: See chart below
Vibration: Fair vibration resistance

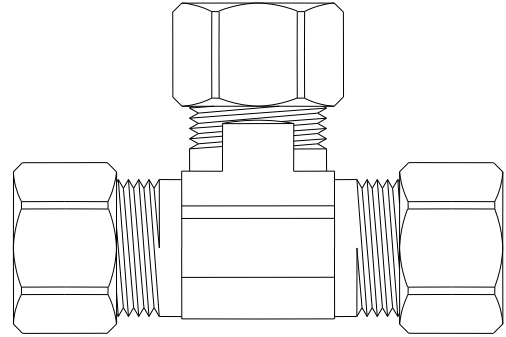

FITTING MATERIAL SPECIFICATIONS

Body	Brass
Compression Sleeve	Brass
Compression Nut	Brass

WORKING PRESSURE

PSI	Tube O.D.	Tube Wall (Inches)
400	1/8	0.030
400	3/16	0.030
300	1/4	0.030
300	5/16	0.032
200	3/8	0.032
200	1/2	0.032
150	5/8	0.035
100	3/4	0.035
75	7/8	0.035

Part Listing:

☐	64-4-4-6	1/4" OD compression x 1/4" OD compression x 3/8" OD compression
☐	64-6-6-4	3/8" OD compression x 3/8" OD compression x 1/4" OD compression
☐	64-6-6-4 B	3/8" OD compression x 3/8" OD compression x 1/4" OD compression, bulk
☐	64-6-6-4-1 B	3/8" OD compression x 3/8" OD compression x 1/4" OD compression, body only, bulk
☐	64-8-8-6	1/2" OD compression x 1/2" OD compression x 3/8" OD compression
☐	64-10-10-6	5/8" OD compression x 5/8" OD compression x 3/8" OD compression
☐	64-10-10-8	5/8" OD compression x 5/8" OD compression x 1/2" OD compression
☐	64-14-14-10 B	7/8" OD compression x 7/8" OD compression x 5/8" OD compression, bulk

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.


300.113 64 Series Reducing Tees - Comp x Comp x Comp REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company

64 Series Compression Reducing Tees

PART DIMENSIONS (Inches)					
Model	Straight Thread (1)	Straight Thread (2)	DIM. A	DIM. B	DIA. C
64-4-4-6	7/16-24	9/16-24	.69	.74	.18
64-6-6-4	9/16-24	7/16-24	.73	.62	.19
64-8-8-6	11/16-20	9/16-24	.94	.75	.31
64-10-10-6	13/16-18	9/16-24	1.06	.94	.50
64-10-10-8	13/16-18	11/16-20	1.07	1.07	.50
64-14-14-10	1-1/8-18	13/16-18	1.25	1.16	.75

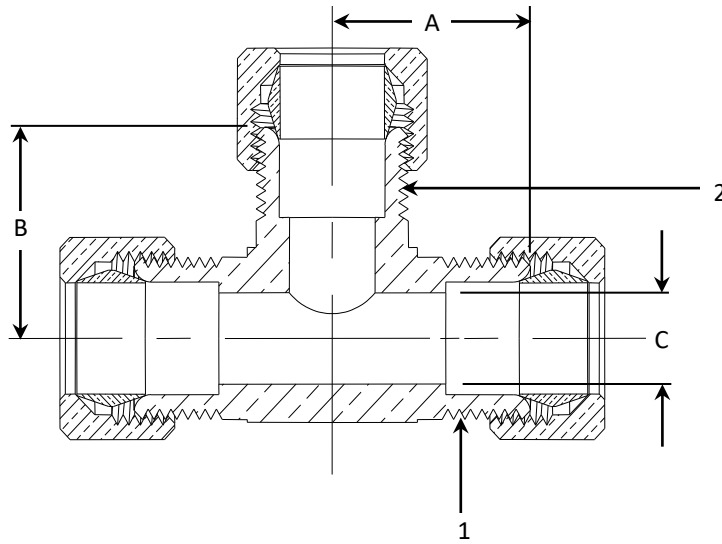

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.113 64 Series Reducing Tees - Comp x Comp x Comp REV 9.19

BrassCraft[®]

©2019 Brasscraft Manufacturing Company