

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

MAU1 Female Gas Adapter - 5/16-16 Flare x Female Iron Pipe

Use: For use with natural, manufactured, mixed, liquefied petroleum gases, and LP gas-air mixtures.


Operating Specifications:

Temperature: -40° - 150° F

Pressure: 1/2 PSI maximum

FITTING MATERIAL SPECIFICATIONS	
Brass Body	Brass
Steel Body	Steel, plated

PART DIMENSIONS (Inches)			
Model	DIA. A	DIM. B	DIM. C
MAU1-10-12	0.50	1.78	1-1/8
MAU1-10-8	0.50	1.66	15/16

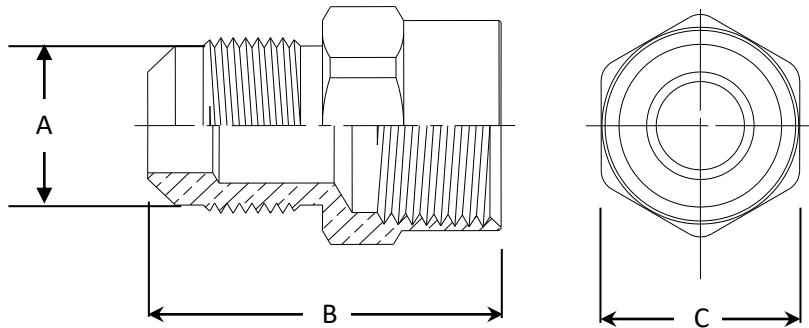

Part Listing:

☐	MAU1-10-12	5/8" OD flare (15/16-16 thread) x 3/4" FIP, brass
☐	MAU1-10-12 BT	5/8" OD flare (15/16-16 thread) x 3/4" FIP, brass, generic bag
☐	MAU1-10-12 K5	5/8" OD flare (15/16-16 thread) x 3/4" FIP, brass, 5 per bag
☐	MAU1-10-12S	5/8" OD flare (15/16-16 thread) x 3/4" FIP, steel
☐	MAU1-10-8	5/8" OD flare (15/16-16 thread) x 1/2" FIP, brass
☐	MAU1-10-8 BT	5/8" OD flare (15/16-16 thread) x 1/2" FIP, brass, generic bag
☐	MAU1-10-8 K5	5/8" OD flare (15/16-16 thread) x 1/2" FIP, brass, 5 per bag
☐	MAU1-10-8S	5/8" OD flare (15/16-16 thread) x 1/2" FIP, steel
☐	MAU1-10-8S B	5/8" OD flare (15/16-16 thread) x 1/2" FIP, steel, bulk

- For use with CSA listed ANSI Z21.24 / CSA 6.10 connectors
- For use with CSA listed ANSI Z21.75 / CSA 6.27 connectors

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®