

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

CSP Series Compression Plugs


Use: For use with instrumentation, hydraulic, and pneumatic systems. Designed for use with aluminum, copper, and plastic tubing. Not intended for use with steel tubing.

Design Features:

- **Little to no tube preparation.** Compression fittings do not require flaring, soldering or other types of tube preparation
- **Available in a broad range of sizes**

Operating Specifications:

Temperature: -65° - 250° F at maximum operating pressures
Working Pressure: See chart below
Vibration: Fair vibration resistance



FITTING MATERIAL SPECIFICATIONS

Compression Plug	Brass
-------------------------	--------------

PART DIMENSIONS (Inches)


Model	DIM. A	DIA. B
CSP-4	.31	.34
CSP-6	.31	.47
CSP-8	.34	.59
CSP-10	.34	.72

WORKING PRESSURE

PSI	Tube O.D.	Tube Wall (Inches)
300	1/4	0.030
200	3/8	0.032
200	1/2	0.032
150	5/8	0.035

Part Listing:

- ☐ CSP-4 For 1/4" OD tube
- ☐ CSP-4 B For 1/4" OD tube, bulk
- ☐ CSP-6 For 3/8" OD tube
- ☐ CSP-6 B For 3/8" OD tube, bulk
- ☐ CSP-8 For 1/2" OD tube
- ☐ CSP-8 B For 1/2" OD tube, bulk
- ☐ CSP-10 For 5/8" OD tube
- ☐ CSP-10 B For 5/8" OD tube, bulk

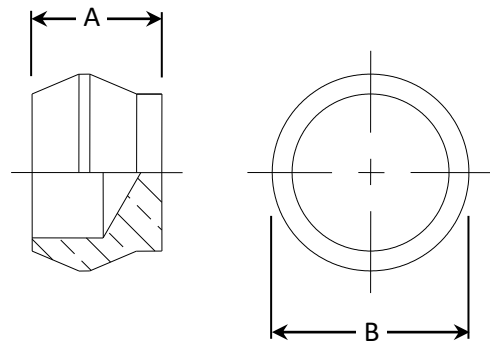

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.122 CSP Series Plugs - Comp x Comp REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company