

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

HUS-12 Garden Hose Swivel Union – Female Hose Thread

Use: For use with residential and commercial grade garden hose. All female hose thread connections require a rubber washer (Items SF0741 and SFB0741 sold separately) inserted prior to installation.

Operating Specifications:

Temperature: -35° - 100°F
Working Pressure: 75 PSI maximum,
intermittent to 150 PSI

Standard


FITTING MATERIAL SPECIFICATIONS

Body	Brass
-------------	-------

Low-lead

FITTING MATERIAL SPECIFICATIONS

Body	Low-lead brass
-------------	----------------

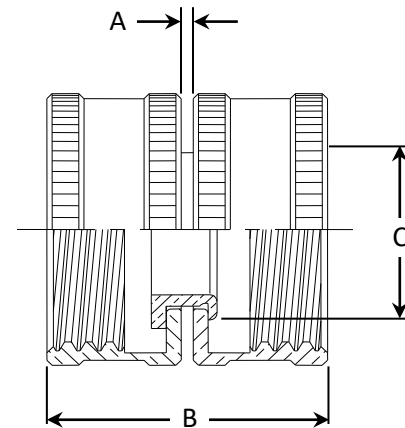

Standard Part Listing:

- ☐ HUS-12 3/4" female hose thread x 3/4" female hose thread, swivel, rough brass
- ☐ HUS-12 B 3/4" female hose thread x 3/4" female hose thread, swivel, rough brass, bulk

Low-lead Part Listing:

- ☐ HUS-12X 3/4" female hose thread x 3/4" female hose thread, swivel, rough brass
- ☐ HUS-12X B 3/4" female hose thread x 3/4" female hose thread, swivel, rough brass, bulk

PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B	DIA. C
HUS-12	.05	1.17	.80
HUS-12-1	.05	1.17	.80

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

300.131 HUS-12 Garden Hose Swivel Union - Female Hose Thread REV 4.22

BrassCraft

©2022 BrassCraft Manufacturing Company