

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:


HC-1 Garden Hose Cap – Female Hose Thread

Use: For use with residential and commercial grade garden hose. All female hose thread connections require a rubber washer inserted prior to installation.

Operating Specifications:

Temperature: -35° to 100°F at maximum operating pressures

Working Pressure: 75 PSI maximum, intermittent to 150 PSI

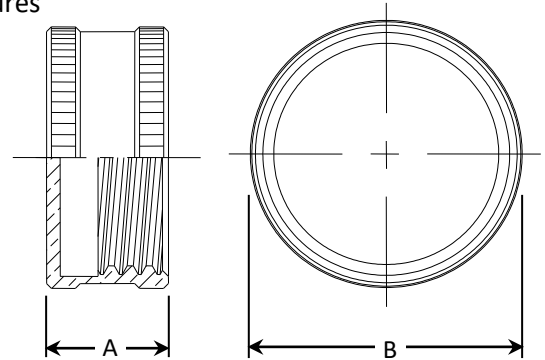

PART DIMENSIONS (Inches)

Model	DIM. A	DIA. B
HC-1	.56	1.19

Standard

FITTING MATERIAL SPECIFICATIONS

Body	Brass
Hose Washer*	EPDM

*Where noted

Low-lead

FITTING MATERIAL SPECIFICATIONS

Body	Low-lead brass
Hose Washer*	EPDM

Standard Part Listing:

- ☐ HC-1 3/4" female hose thread, rough brass with hose washer
- ☐ HC-1 B 3/4" female hose thread, rough brass, bulk
- ☐ HC-1 CB 3/4" female hose thread, chrome plated, bulk

Low-lead Part Listing:

- ☐ HC-1X 3/4" female hose thread, rough brass with hose washer (Made in USA)
- ☐ HC-1X B 3/4" female hose thread, rough brass, bulk (Made in USA)

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.132 HC-1 Garden Hose Cap REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company