

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

HUS11 Garden Hose Swivel Union – Female Hose Thread x Female Iron Pipe

Use: For use with residential and commercial grade garden hose. All female hose thread connections require a rubber washer (sold separately) inserted prior to installation.

Operating Specifications:

Working Pressure: 75 PSI maximum, intermittent to 150 PSI

Standard


FITTING MATERIAL SPECIFICATIONS

Body	Brass
-------------	-------

Low-lead

FITTING MATERIAL SPECIFICATIONS

Body	Low-lead brass
-------------	----------------

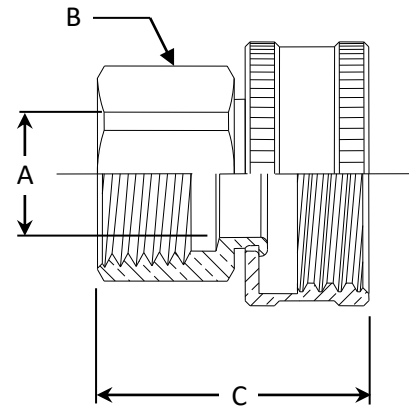

Standard Part Listing:

- ☐ HUS11-8-12 3/4" Female Hose Thread (swivel) x 1/2" Female Iron Pipe, Rough Brass
- ☐ HUS11-12-12 3/4" Female Hose Thread (swivel) x 3/4" Female Iron Pipe, Rough Brass
- ☐ HUS11-12-12 B 3/4" Female Hose Thread (swivel) x 3/4" Female Iron Pipe, Rough Brass, Bulk

Low-lead Part Listing:

- ☐ HUS11-8-12X 3/4" Female Hose Thread (swivel) x 1/2" Female Iron Pipe, Rough Brass
- ☐ HUS11-8-12X B 3/4" Female Hose Thread (swivel) x 1/2" Female Iron Pipe, Rough Brass, Bulk
- ☐ HUS11-12-12X 3/4" Female Hose Thread (swivel) x 3/4" Female Iron Pipe, Rough Brass
- ☐ HUS11-12-12X B 3/4" Female Hose Thread (swivel) x 3/4" Female Iron Pipe, Rough Brass, Bulk

PART DIMENSIONS (Inches)

Model	DIA. A	HEX B	DIM. C
HUS11-8-12	.578	7/8	1.20
HUS11-12-12	.578	1-1/8	1.20

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

300.133 HUS11 Garden Hose Swivel Adapter - Hose Thread x FIP REV 8.25

BrassCraft

© 2025 BrassCraft Manufacturing Company