

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

63PT Series Brass Inserts for Plastic Tubing

Use: For use in instrumentation, hydraulic, pneumatic systems, and with plastic tubing in potable water distribution systems. Not intended for use with non-plastic tubing.


Design Features:

- Available in a broad range of sizes and styles
- Fitting does not require any flaring, soldering, or other type of tubing preparation



Operating Specifications:

Temperature: 40° - 180° F
Pressures: 125 PSI maximum

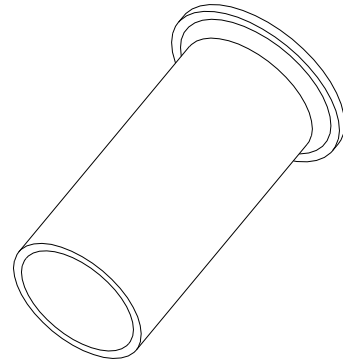

MATERIAL SPECIFICATIONS

Insert	Brass
--------	-------

PART DIMENSIONS (Inches)


Model	DIM. A	DIA. B
63PT-4X	.51	.17
63PT-5X	.63	.19
63PT-6X	.56	.25

PART DIMENSIONS (Inches)

Model	DIM. A	DIA. B
63PT-8X	.72	.37
63PT-10X	.73	.48

Part Listing:

- ☐ 63PT-4X For 1/4" OD tube
- ☐ 63PT-5X For 5/16" OD tube
- ☐ 63PT-6X For 3/8" OD tube
- ☐ 63PT-8X For 1/2" OD tube
- ☐ 63PT-10X For 5/8" OD tube

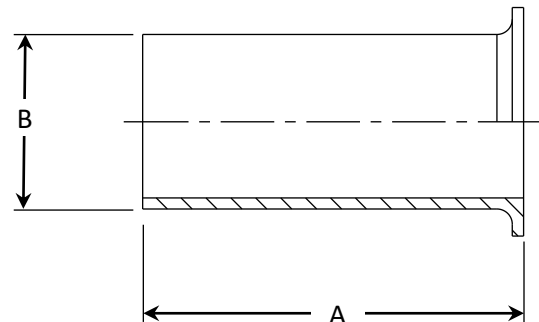

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.158 63PT Series Brass Inserts for Nylon & Plastic Hose REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company