

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

126 Series Hose Barb x Female Iron Pipe Adaptor

Use: For use plastic or rubber tubing. Installation requires a hose clamp.

Design Features:

- Manufactured with dryseal pipe threads
- Available in a broad range of sizes


Operating Specifications:

Temperature: -40° to 160° F

Working Pressure: 150 PSI

FITTING MATERIAL SPECIFICATIONS

Body	Brass
-------------	-------

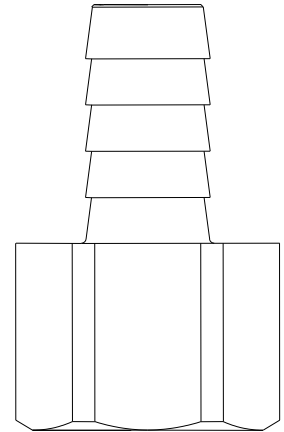

Part Listing:

☐	126-2-2	1/8" hose barb x 1/8" FIP
☐	126-3-2	3/16" hose barb x 1/8" FIP
☐	126-3-2 B	3/16" hose barb x 1/8" FIP, bulk
☐	126-4-2	1/4" hose barb x 1/8" FIP
☐	126-4-2 B	1/4" hose barb x 1/8" FIP, bulk
☐	126-4-4	1/4" hose barb x 1/4" FIP
☐	126-4-4 B	1/4" hose barb x 1/4" FIP, bulk
☐	126-5-2	5/16" hose barb x 1/8" FIP
☐	126-5-2 B	5/16" hose barb x 1/8" FIP, bulk
☐	126-5-4	5/16" hose barb x 1/4" FIP
☐	126-6-2	3/8" hose barb x 1/8" FIP
☐	126-6-2 B	3/8" hose barb x 1/8" FIP, bulk
☐	126-6-4	3/8" hose barb x 1/4" FIP
☐	126-6-4 B	3/8" hose barb x 1/4" FIP, bulk
☐	126-6-6	3/8" hose barb x 3/8" FIP
☐	126-6-6 B	3/8" hose barb x 3/8" FIP, bulk
☐	126-6-8	3/8" hose barb x 1/2" FIP
☐	126-6-8 B	3/8" hose barb x 1/2" FIP, bulk
☐	126-8-4	1/2" hose barb x 1/4" FIP
☐	126-8-4 B	1/2" hose barb x 1/4" FIP, bulk
☐	126-8-6	1/2" hose barb x 3/8" FIP

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.201 126 Series Hose Barb x FIP Adaptor REV 9.19


BrassCraft®

©2019 Brasscraft Manufacturing Company

126 Series Hose Barb x Female Iron Pipe Adaptor

Part Listing (con't):

☐	126-8-6 B	1/2" hose barb x 3/8" FIP, bulk
☐	126-8-8	1/2" hose barb x 1/2" FIP
☐	126-8-8 B	1/2" hose barb x 1/2" FIP, bulk
☐	126-12-12	3/4" hose barb x 3/4" FIP

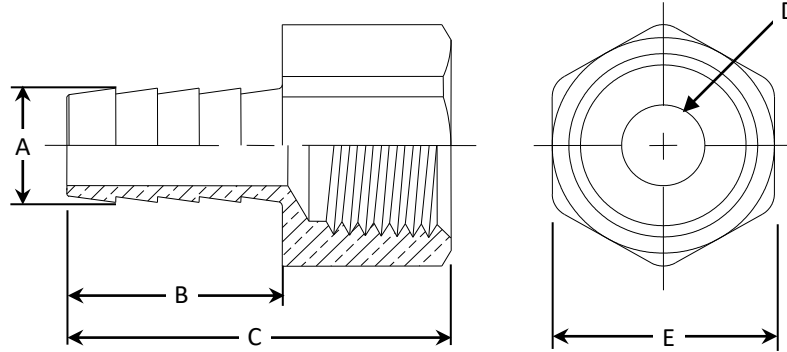

PART DIMENSIONS (Inches)					
Model	DIA. A	DIM. B	DIM. C	DIA. D	HEX. E
126-2-2	.187	.46	.96	.090	1/2
126-3-2	.227	.69	1.19	.125	1/2
126-4-2	.290	.97	1.47	.187	1/2
126-4-4	.290	.97	1.58	.187	11/16
126-5-2	.375	.90	1.42	.215	1/2
126-5-4	.353	.97	1.58	.250	11/16
126-6-2	.415	.97	1.47	.281	1/2
126-6-4	.415	.97	1.58	.281	11/16
126-6-6	.415	.97	1.63	.281	13/16
126-6-8	.415	.97	1.73	.281	1
126-8-4	.530	.97	1.66	.375	5/8
126-8-6	.530	.97	1.63	.375	13/16
126-8-8	.530	.97	1.73	.375	1
126-12-12	.790	1.17	2.19	.625	1-3/16

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.