

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

73 Series Hose Barb Splicer

Use: For use with plastic or rubber tubing. Installation requires a hose clamp.

Operating Specifications:

Temperature: -40° - 160° F



Working Pressure: 150 PSI

FITTING MATERIAL SPECIFICATIONS

Body	Brass
-------------	-------

PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B	DIA. C
73-3	.69	1.44	.31
73-4	.75	1.56	.38
73-5	.97	2.00	.353
73-6	.97	2.00	.415
73-8	.97	2.00	.530
73-10	.97	2.00	.75

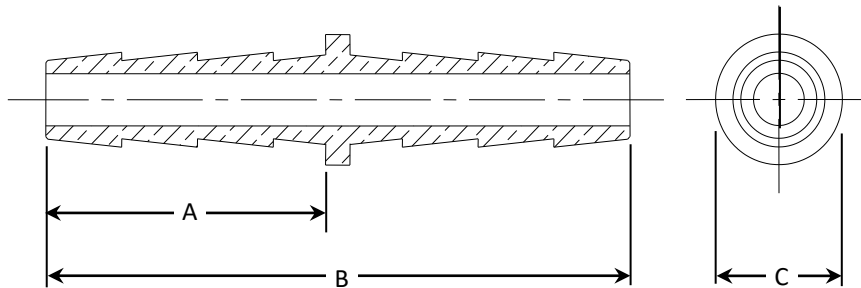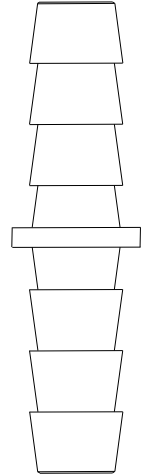

Part Listing:

- | | |
|----------------------------------|----------------------------------|
| ☐ 73-3 B | 1/8" hose barb, both ends, bulk |
| ☐ 73-4 | 1/4" hose barb, both ends |
| ☐ 73-4 B | 1/4" hose barb, both ends, bulk |
| ☐ 73-5 | 5/16" hose barb, both ends |
| ☐ 73-5 B | 5/16" hose barb, both ends, bulk |
| ☐ 73-6 | 3/8" hose barb, both ends |
| ☐ 73-6 B | 3/8" hose barb, both ends, bulk |
| ☐ 73-8 | 1/2" hose barb, both ends |
| ☐ 73-8 B | 1/2" hose barb, both ends, bulk |
| ☐ 73-10 B | 5/8" hose barb, both ends, bulk |

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.