


Submitted Model No.: **Specific Features:**

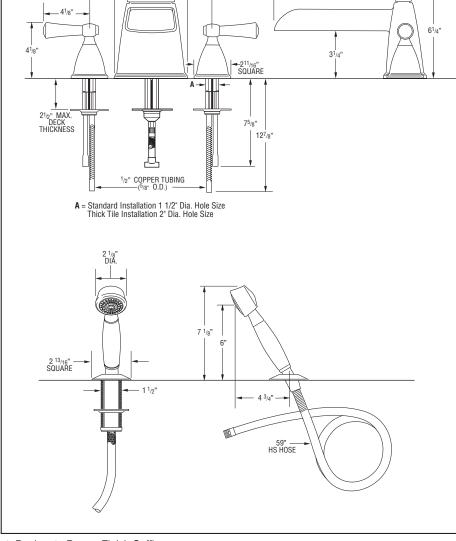

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BRIZO

BATH VALVES

- Vesi[®] Collection Open Channel Spout
- Two-Handle Roman Tub Valve Trim
- Flexible Deck or Ledge Mount
- Ceramic Disc Valving
- 13" 16" Centers
- Adjustable Rough-In (R64707) for Thin or Thick Deck Installations Must be Ordered Separately
- Four Hole Installation

STANDARD SPECIFICATIONS:

- Roman tub valve.
- 13" 16" centers.
- Valve mechanism shall be of the rotating cylinder type with 180° rotation.
- Ceramic disc valving.
- Hot and cold stem units shall be interchangeable.
- All operating parts shall be replaceable from
- Adjustable rough-in for thick and thin deck installations.
- Handshower has two integral check valves for backflow protection.
- Handshower flows 2.0 gpm @ 80 psi.
- Rough-in kit (R64707) must be ordered to complete installation.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.








COMPLIES WITH:

- ANSI/ASME A112.18.1 / CSA B125.1
- ICC/ANSI A117.1



Delta Faucet Company

Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2012 Masco Corporation of Indiana