


**Submitted Model No.:** 

**Specific Features:** 

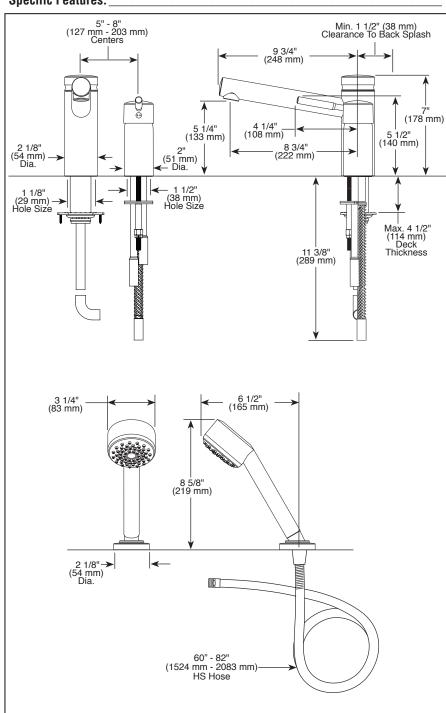

▲ Designate Proper Finish Suffix

# BRIZO

# **BATH VALVES**

- Quiessence<sup>®</sup> Single Handle Roman Tub Valve
- Two Hole Applications (67114 Series)
- Three Hole Applications (67214 Series)
- Temperature and Volume Controlled with Single Handle
- 5" to 8" Centers
- Hand Held Retractable Shower (67214 Series)
- Flexible Ledge Mount
- Certified Dual Check Valves

## **STANDARD SPECIFICATIONS:**


- Single handle Roman Tub valve for concealed mounting on two and 3 hole applications.
- Control mechanism shall be of the rotating ceramic cartridge type.
- Temperature and volume controlled with single handle.
- Minimum 4 1/2" distance between holes.
- Spout with integral diverter, vacuum breaker not required (67214).
- Handshower flows 2.0 gpm @ 80 psi (67214).
- Minimum 4 1/2" (114 mm) to maximum 10" (254 mm) distance between holes.
- Conventional installation kit adjusts to 4 1/2" maximum deck thickness.
- Certified dual check valves.
- 60" 82" (1524 mm 2083 mm) stretchable finished metal hose.

#### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1- Valve control only.



## **Delta Faucet Company**

Indianapolis, IN 46280 A Division of Masco Corporation of Indiana © 2014 Masco Corporation of Indiana