



Independence Line ®

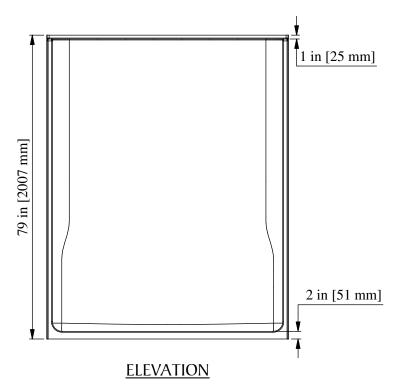

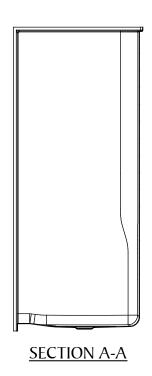

 $31\frac{1}{2}$ in [800 mm] $\emptyset 3\frac{3}{8}$ in [86 mm] Drain mm 33% in [857 mm] in [387] 63 in [1600 mm] **PLAN** 63" [1600mm] Barrier-Free Shower

CENTER DRAIN

w/ 2" [51mm] Threshold

PRODUCT SPECIFICATIONS:

- Product material AcrylixTM surface with fiberglass composite reinforcement.
- Barrier-Free installation requires a 2" recess.
- Special installation instruction for this unit must be followed carefully.
- Product complies with NAHB, HUD UM-73A, and CSA B45.5-17/ IAPMO Z124-2017.
- This unit can be reinforced to meet the accessibility requirements for Type B dwellings upon request.
- When properly accessorized and installed, product will meet requirements of ADA (2010 Std), ICC/ANSI A117.1-2017, ABA or UFAS.
- Product has a Class B fire rating as determined by ASTM E-84 test method.
- Reinforced & slip resistant floor.
- Integral 1" [25mm] nailing flange.
- Shower Area: W- 60" [1524mm] x D- 31-1/4" [794mm] Door Opening: W- 60" [1524mm] x H- 75-3/4" [1924mm]
- All dimensions =/- 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.
- Dimensions are the same for RE, MP, and all other versions of this model.

6333BF

63" [1600mm] Barrier-Free Shower w/ 2" [51mm] Threshold & Center Drain

Shippenville, PA 16254

Phone: (814) 226-5374 Toll Free: (800) 576-9228 Fax: (814) 226-0730 www.clarionbathware.com

Signatures For Approval: Customer: Arch./Engr:	Date:	DWG. # 6333BF -CUT
Quote #:	·	By: NMH Date: 1/02/2018