


SECTION "A-A"

ELEVATION

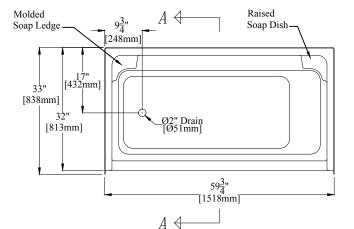

59 3/4" [1518mm] Tiled Tub/Shower

Left Hand Version (8011LSDX) Shown

PRODUCT SPECIFICATIONS:

- Product material AcrylixTM surface with fiberglass composite reinforcement.
- Product complies with NAHB, HUD UM-73A, and CSA B45.5-17/ IAPMO Z124-2017.
- This unit can be reinforced to meet the accessibility requirements for Type B dwellings upon request.
- When properly accessorized and installed, product meets requirements of ADA (2010 Std), ICC/ANSI A117.1-2017, ABA or UFAS.
- Product has a Class B fire rating as determined by ASTM E-84 test method.
- Sufficient drain clearance to accommodate above the floor plumbing.
- Reinforced & slip resistant floor.
- Integral 1" [25mm] nailing flange.
- Factory drilled 2 1/2" [64mm] overflow.
- Door Opening: W-56" [1422mm] x H-58" [1473mm]
- Bathwell Dimensions (At Top): W-53" [1346mm] x D-21 3/4" [552mm] x H-13 1/2" [343mm]
- Bathwell Dimensions (At Bottom): W-43" [1092mm] x D-18 1/4" [464mm]
- Bathwell Capacity (At Overflow): 36 Gal [136L]
- Water Level (At Overflow): 9 3/4" [248mm]
- All dimensions +/- 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.
- Dimensions are the same for RE, MP, and all other versions of this model.

8011LSDX or 8011RSDX

59 3/4" [1518mm] Tiled Tub/Shower w/ 18-1/2" [470mm] Apron, Molded Soap Ledges, & Left or Right Hand Drain

BATHWARE 44 Amsler Ave. Shippenville, PA 16254

Phone: (814) 226-5374 Toll Free: (800) 576-9228 Fax: (814) 226-0730

www.clarionbathware.com

 Signatures For Approval:
 Date:
 Dwg. #

 Customer:
 8011LSXD or

 Arch./Engr:
 RSDX-CUT

 Quote #:
 Dwg. By: NMH

 Job Name:
 DATE: 1/03/2018