


#### CROSS SECTION OF THRESHOLD

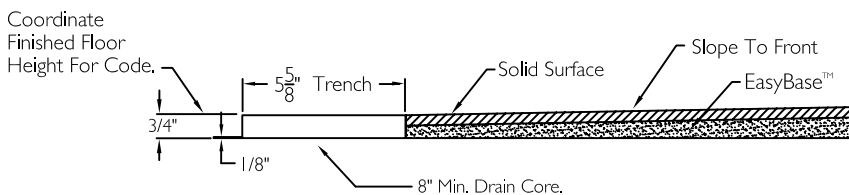

## SUBMITTAL

This shower enclosure shall be model SSB 5050 TR .75 Base center drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 50 3/8" x 50 1/4" x 4 1/2" with a 3/4" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:

- 1) Shower base has 48" x 48" inside dimensions,
- 2) EasyBase™ self sustaining bottom,
- 3) integral front trench drain,
- 4) Solid Surface finish,
- 5) 3/4" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 50 3/8" AND 50 1/4". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. SSB 5050 TR .75 Base	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. SSB 5050 TR .75 Easy Base	
	Rep			Date Issued. 5-16-12	Drawing Rev.
	Wholesaler			Material. Solid Surface	
	Comments			Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	