


CROSS SECTION OF THRESHOLD

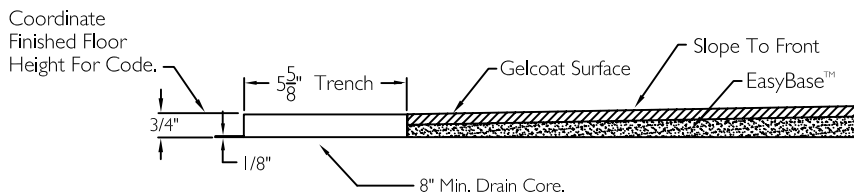

SUBMITTAL

This shower enclosure shall be model XSB 5050 TR .75 Base center drain. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 50 3/8" x 50 1/4" x 4 1/2" with a 3/4" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:

- 1) Shower base has 48" x 48" inside dimensions,
- 2) EasyBase™ self sustaining bottom,
- 3) integral front trench drain,
- 4) Gelcoat finish,
- 5) 3/4" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 50 3/8" AND 50 1/4". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: XST 5050 TR 5P .75.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. XSB 5050 TR .75 Base	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. XSB 5050 TR .75 Easy Base	
	Rep			Date Issued. 5-16-12	Drawing Rev.
	Wholesaler			Material. Gelcoat	
	Comments			Color,	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	