

## FRONT VIEW Water Outlet Optional Curtain Rod Soap 30" Slide Bar Ledge Optional 30' Ledge Peened Grab Bar Peened $73\frac{3}{4}$ Grab Bai 兜 Valve / Optional Padded Fold Up Leg Ledge $40\frac{3}{4}$ $34\frac{3}{4}$ 183 $\Gamma^{\frac{3}{4}}$



## CROSS SECTION OF THRESHOLD

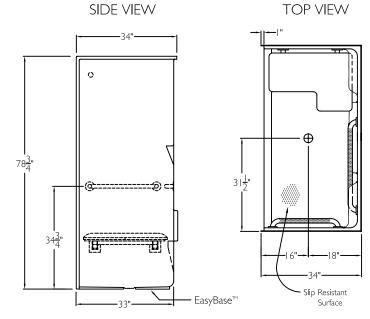

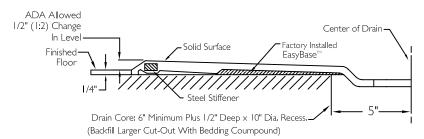

## **SUBMITTAL**

This shower enclosure shall be model SST 6333 BF .75 right, or left. Finished surface shall be of a sanitary grade solid surface, exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 63"  $\times$  34"  $\times$  78 3/4". The unit shall meet ANSI Z I 24.I -2. ANSI A I I 7.I , ADA, MAS, HUD, BOCA, NAHB UPC, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories: I) One 36"  $\times$  I I/4" diameter I8 gauge stainless steel peened grab bar on the back wall, 2) one 24"  $\times$  I I/4" I8 gauge stainless steel peened grab bar on the side wall, both with I I/2" statute clearance, secured from the rear with stainless steel bolts 3"  $\times$  3"  $\times$  I I gauge metal mounting plates, 3) white 26"  $\times$  21" frameless padded fold up seat, 4) molded comer soap ledges, 5) molded leg ledge, 6) tile finish, 7) diamond accents, 8) one inch diameter I8 gauge stainless steel curtain rod with receiver cups, 9) tri cell backing, 10) EasyBase  $^{\text{TM}}$  self sustaining bottom, I I) 3/4" threshold.

ı	optional accessories:						
	Factory Plumbing Install Option: YES NO						
	PB Pressure Balancing Mixing Valve (ADA / MAS)						
	☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / MAS)						

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 63" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. SST 6333 BF .75 MAS-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372	Engineer			Drawing No. SST 6333 BF .75 PHBW PHSW FPD CR VP EB	
	Rep			Date Issued. 3-28-12	Drawing Rev.
	Wholesaler			Material Solid Surface	
tel 800.443.7269	Comments			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com				Dimensions are in inches. Due dimensions may vary ± 1/2"	to the nature of the materials