

FRONT VIFW White Curtain Rod 30" Slide Bar w/ Receiver Cups Seam 6" Optional 5" 12" Water Outlet 30' Optional 48" × 1 1/4" White Grab Ban Valve Optional 24" × 1 1/4" 74" White Grab Bar 71술 Seam. $41\frac{1}{4}$ ·24" × 1 1/4" 35<u>√</u>" 35<u>-</u>1" White Grab Bar



CROSS SECTION OF THRESHOLD

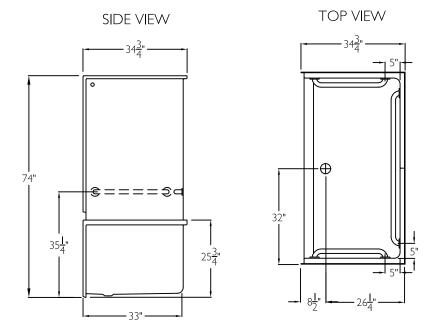



SUBMITTAL

This shower enclosure shall be model XSS 6037 BF 3P .75, left or right. Finished surface shall be of a sanitary grade applied acrylic. The base shall be attached to the sump in such a manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 64" \times 34 3/4" \times 74". The unit shall meet CSA B45.5-11, HUD-UM73, ADA, ANSI A117.1, and Home Innovation Research Lab.

HANDED BY THE CENTER

The enclosure shall be equipped with the following accessories: I) One 48" \times I I/4" diameter white horizontal grab bar on the back wall, 2) Two 24" \times I I/4" diameter white horizontal grab bars, one on each side wall, all with I I/2" statute clearance, mounted with stainless steel bolts, and secured from the rear with 3" \times 3" \times I I gauge metal mounting plates, 3) One inch diameter, I 8 gauge white curtain rod with receiver cups, 4) Three piece sectional design, 5) Tri-Cell backing on all walls, 6) Factory installed Armor Core Easy Base, 7) I I/4" threshold.

OPTIONAL ACCESSORIES: Factory Plumbing Install Option: YES NO					
☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)					
☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)					

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 64" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FORA DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. XSS 6037 BF 3P I.25 L-Bar-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect			Drawing No. XSS 6037 BF 3P 1.25 WHBW WHSW2 WCR Tri-Cell Easy Base	
	Engineer			Date Issued. 4-3-12	Drawing Rev. 4-14-17
	Rep			Material, Acrylic Surface	
	Wholesaler			Color.	
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"		

Location of Easy Base