

FRONT VIEW



SIDE VIEW

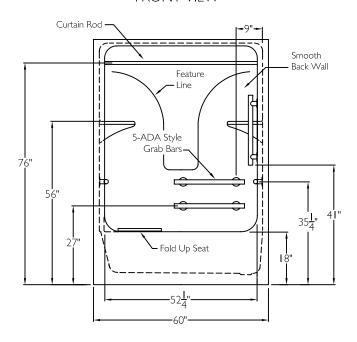

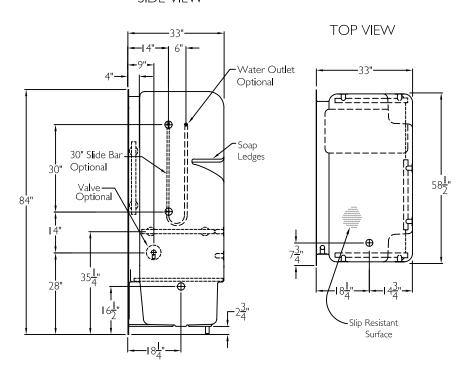

SUBMITTAL

This shower enclosure shall be model XSA 6032 TS Finished surface shall be of a sanitary grade acrylic exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 60" \times 33" \times 84". The unit shall meet ANSI Z124.I-2, ANSI A117.I, ADA, HUD, BOCA, NAHB, UPC, CSA, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories: I) two 24" \times I I/4" diameter I8 gauge white ADA style grab bars on the back wall, 2) two 24" \times I I/4" I8 gauge white ADA bars, one on each side wall, 3) one 24" \times I I/4" diameter I8 gauge ADA style grab bar vertical on the valve wall, all with I I/2" statute clearance, secured from the rear with stainless steel bolts and 3" \times 3" \times II gauge metal mounting plates, 4) 27" \times 15" white HDPE, fold up seat, 5) smooth back wall with no diamond pattern, 6) molded soap ledges, 7) one inch diameter, I8 gauge white curtain rod, 8) tri-cell backing .

| OPTIONAL ACCESSORIES: Factory Plumbing Install Option: YES NO | | | | | | |
|---|--|--|--|--|--|--|
| ☐ PB Pressure Balancing Mixing Valve (ADA / ANSI) | | | | | | |
| ☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI) | | | | | | |

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 60" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

| Job Name | Approved By | Name | Date | COMFORT DESIGNS | |
|---|-------------|------|------|---|-------------|
| Project No | Architect | | | Model No. XSA 6032 TS-I | |
| Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com | Engineer | | | Drawing No. XSA 6032 TS 5- White ADA Style Grab Bars HDP WCR VP | |
| | Rep | | | Date Issued. 3-30-12 | Drawing Rev |
| | Wholesaler | | | Material. Acrylic | |
| | Comments | | | Color. | |
| | | | | Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2" | |