






TOP VIEW

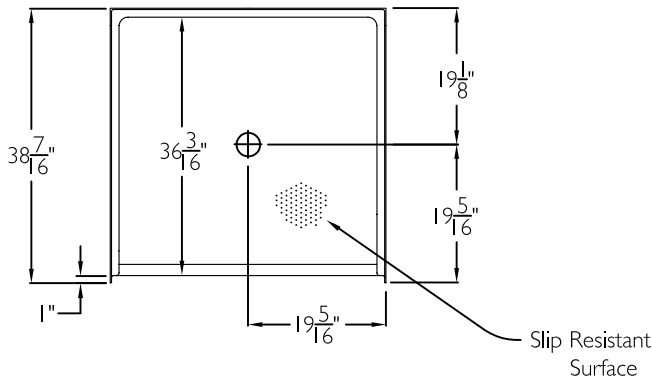


FRONT VIEW

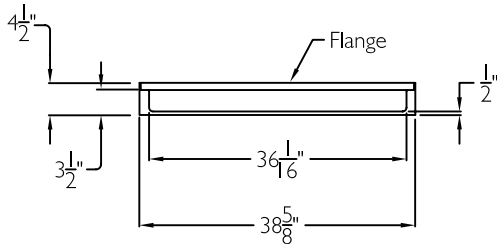

SIDE VIEW

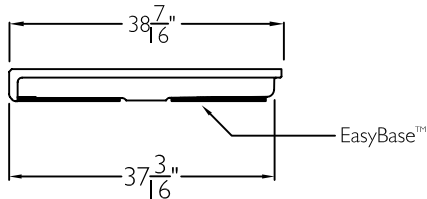

CROSS SECTION OF THRESHOLD

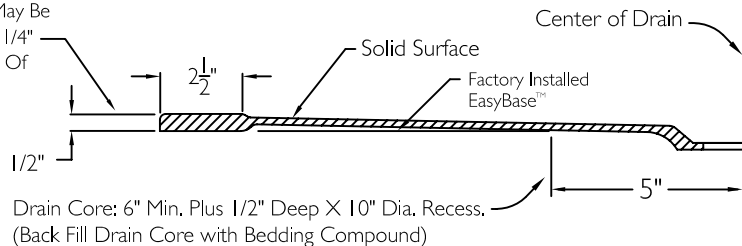

SUBMITTAL

This shower enclosure shall be model SSB 3838 BF .50 Base center drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 38 5/8" x 38 7/16" x 4 1/2" with a .50" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

NOTE: Inside dimensions comply with ADA, ANSI A117.1, UFAS codes for accessible Transfer Shower. Compliance can be met if code compliant walls with grab bars, seat, and valve package with hand held shower are installed. Walls and accessories above the base by others.

The enclosure shall be equipped with the following features:

- 1) Low entry threshold,
- 2) EasyBase™ self sustaining bottom,
- 3) Slip resistant surface on floor,
- 4) Solid Surface finish,
- 5) .50" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 38 5/8" AND 38 7/16", FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: SST 3838 BF .50 C.

Coordinate Finished Floor Height For Code. Finished Floor May Be No More Than 1/4" Below The Top Of Compartment Threshold.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No.	SSB 3838 BF .50 C Base- I
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No.	SSB 3838 BF .50 C Easy Base
	Rep			Date Issued.	5-7-12 Drawing Rev.
	Wholesaler			Material.	Solid Surface
	Comments			Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2"$	