


## TOP VIEW



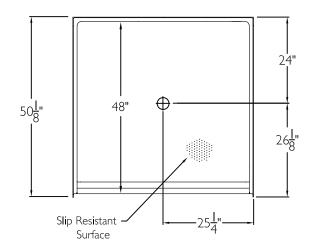

## SIDE VIEW

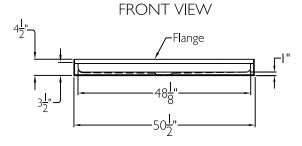

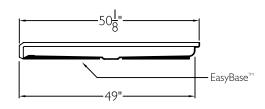

## **SUBMITTAL**


This shower enclosure shall be model XSB 5050 BF 1.0" Base center drain. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 50 1/2"  $\times$  50 1/8 "  $\times$  4 1/2" with a 1.0" threshold.

The unit shall meet ANSI Z 124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following features:

- 1) Low entry change of level threshold,
- 2) EasyBase<sup>™</sup> self sustaining bottom,
- 3) Slip resistant surface on floor,
- 4) Gelcoat finish,
- 5) I.0" threshold.

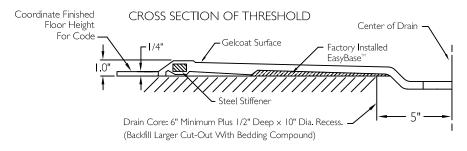

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 50 1/2" AND 50 1/8". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: XST 5050 BF I.O C.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. XSB 5050 BF 1.0 COL C Base-1	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. XSB 5050 BF I.0 COL C Easy Base	
	Rep			Date Issued. 6-15-12	Drawing Rev. 8-27-13
	Wholesaler			Material. Gelcoat	
	Comments			Color,	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm$ 1/2"	