

FRONT VIEW White Curtain Rod w/ Receiver Cups Soap Dishe: 18" × 33 1/2" × I 1/4" White Textured L-Grab bar $32" \times 21"$ 738 Frameless White Padded Fold Up Seat 348 18<u>5</u>" <u>5</u>, 36" Location of Easy Base 39



CROSS SECTION OF THRESHOLD

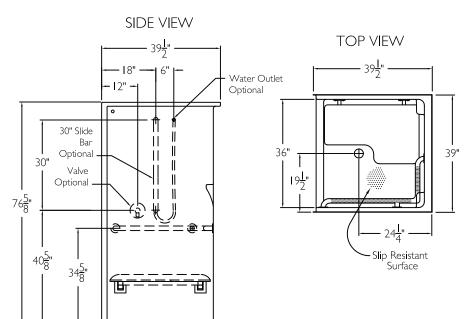

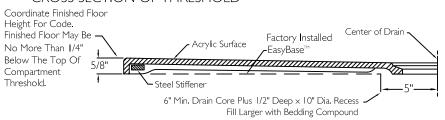

SUBMITTAL

This shower enclosure shall be model XSS 3698 BF .625, right. Finished surface shall be of a sanitary grade applied acrylic. The base shall be attached to the sump in such a manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 39" \times 39 I/2" \times 76 5/8". The unit shall meet CSA B45.5-II, HUD-UM73, ADA, MAS, and Home Innovation Research Lab.

HANDED BY THE VALVE

The enclosure shall be equipped with the following accessories:

- I) One 18" \times 33 1/2" \times 1 1/4" diameter 18 gauge white textured L-grab bar, with 1 1/2" statute clearance, secured from the rear with stainless steel bolts and 3" \times 3" \times 11 gauge metal mounting plate, 2) 32" \times 21" white frameless padded fold up seat,
- 3) One inch diameter white curtain rod with receiver cups,
- 4) Molded corner soap ledges, 5) Tri-Cell backing on walls,
- 6) Factory installed Easy Base self sustaining bottom,
- 7) 5/8" threshold.

optional accessories;
Factory Plumbing Install Option: YES NO
☐ PB Pressure Balancing Mixing Valve (ADA / MAS)
☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / MAS)

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 39" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FORA DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. XSS 3698 BF .625-1 MAS	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect			Drawing No. XSS 3698 BF .625 WTLB FPD WCR VP Tri-Cell Easy Base	
	Engineer			Date Issued. 4-3-12	Drawing Rev. 11-14-16
	Rep			Material, Acrylic Surface	
	Wholesaler			Color,	
	Comments			Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	