

FRONT VIEW White Curtain Rod w/ Receiver Cups 24" × 1 1/4" White Grab Bar Soap Dishes 18" × 33 1/2" × I I/4" White L-Grab bar $32" \times 21"$ Frameless White HDPE Fold Up Seat 395 345" 18<u>5</u>" <u>5</u>,, 36" Location of Easy Base 39'



CROSS SECTION OF THRESHOLD

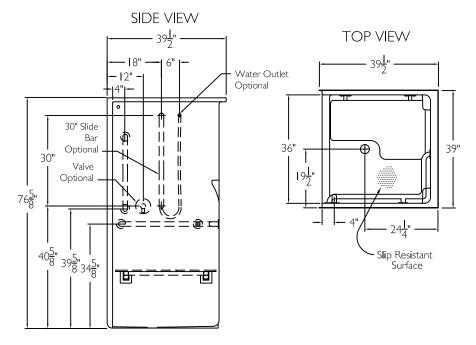

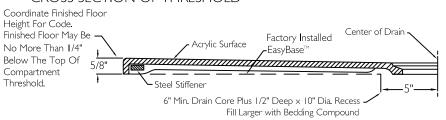

SUBMITTAL

This shower enclosure shall be model XSS 3698 BF .625, right. Finished surface shall be of a sanitary grade applied acrylic. The base shall be attached to the sump in such a manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 39" x 39 1/2" x 76 5/8". The unit shall meet CSA B45.5-11, HUD-UM73, ADA, ANSI A117.1, and Home Innovation Research Lab.

HANDED BY THE VALVE

The enclosure shall be equipped with the following accessories:

- I) One $18" \times 33 \text{ I}/2" \times \text{I} \text{ I}/4"$ diameter 18 gauge white L-grab bar, 2) One $24" \times \text{I} \text{ I}/4"$ diameter 18 gauge white vertical grab bar, both with I I/2" statute clearance, secured from the rear with stainless steel bolts and $3" \times 3" \times \text{I} \text{ I}$ gauge metal mounting plate,
- 3) 32" × 21" white frameless HDPE fold up seat,
- 4) One inch diameter white curtain rod with receiver cups,
- 5) Molded corner soap ledges, 6) Tri-Cell backing on walls,
- 7) Factory installed Easy Base self sustaining bottom,
- 8) 5/8" threshold.

OPTIONAL ACCESSORIES:				
Factory Plumbing Install Option: YES NO				
☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)				
☐ HH Hand held shower assembly with slide bar, vacuun breaker and 60" hose (ADA / ANSI)				

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 39" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FORA DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE,

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR,

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. XSS 3698 BF .625-I	
Comfort Designs	Architect		Drawing No. XSS 3698 BF .625 WLB WVB FHDP WCR Tri-Cell Easy Base	
435 Industrial Road	Engineer		Date Issued. 4-3-12	Drawing Rev. 11-14-16
Savannah, TN 38372	Rep		Material Acrylic Surface	·
tel 800.443.7269	Wholesaler		Color.	
fax 731.925.4290 www.comfortdesignsbathware.com	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	