Subway Tile Pattern Drywall Receiver Flange 7888 Nood Backing TOP VIEW



SUBMITTAL


This shower enclosure shall be model SST 3838 BF RRF I.0 center, right, or left. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.


HANDED BY THE CENTER.


The unit shall have outside dimensions of 38 I/2" \times 37 I/8" \times 78 7/8". The base shall be attached to the sump in such a manner to form an integral part with an inner and outer coating of reinforced polyester resin. The unit shall meet BOCA, HUD, FHA, ANSI Z124.I-2, Home Innovation Research Lab, UPC, CSA B45.5, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:

- 1) Wood backing on the back wall for future horizontal grab bar,
- 2) Wood backing on both side walls for future horizontal and vertical grab bars, (Future Grab Bars By Others),
- 3) Wood backing on both side walls for future fold up seat. (Future Seat By Others),
- 4) Subway tile finish on walls,
- 5) Molded recessed receiver flanges on both sides,
- 6) Center drain location,
- 7) 4.0" Threshold.

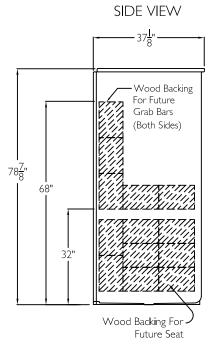

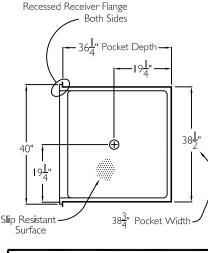



OPTIONAL ACCESSORIES:


Factory Plumbing Install Option: YES NO

☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)

☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)

CROSS SECTION OF THRESHOLD

Coordinate Finished Floor Height For Code. Finished Floor May Be — No More Than 1/4" Below The Top Of Compartment Threshold.

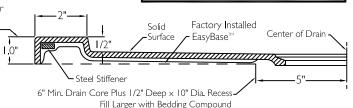

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 38 I/2" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

Till Larger with bedding compound					
Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. SST 3838 BF RRF I.0 RRF-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269	Architect			Drawing No. SST 3838 BF RRF I.O ANSI-B Wood Backing Easy Base	
	Engineer			Date Issued. 9-29-14	Drawing Rev. 5-22-15
	Rep			Material. Solid Surface	
	Wholesaler			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com	Comments			Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	