


## CROSS SECTION OF THRESHOLD

Coordinate Finished Floor Height For Code. Finished Floor May Be No More Than 1/4" Below The Top Of Compartment Threshold.

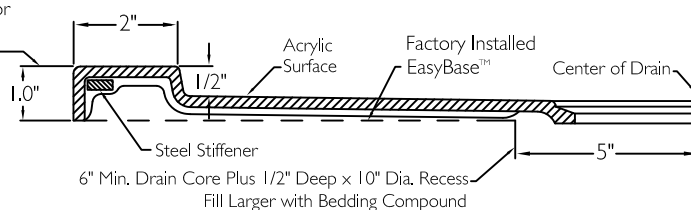

## SUBMITTAL

This shower enclosure shall be model XSS 3838 BF 1.0 center, left or right. Finished surface shall be of a sanitary grade applied acrylic. The base shall be attached to the sump in such manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 38 1/2" x 37 1/8" x 78 7/8". The unit shall meet CSA B45.5-11, HUD-UM73, ANSI B, and Home Innovation Research Lab.

## HANDED BY THE CENTER

The enclosure shall be equipped with the following accessories:

- 1) Wood backing on the back wall for future horizontal grab bar,
- 2) Wood backing on both side walls for future horizontal and vertical grab bars, (future grab bars by others),
- 3) Wood backing on both side walls for future fold up seat, (future seat by others),
- 4) One inch diameter white curtain rod with receiver cups,
- 5) Subway tile pattern on walls,
- 6) Molded recessed receiver flanges on each side,
- 7) Center drain location,
- 8) Tri-Cell backing,
- 9) Factory installed Easy Base self sustaining bottom,
- 10) 1.0" vertical threshold.

### OPTIONAL ACCESSORIES:

Factory Plumbing Install Option: ☐ YES ☐ NO

☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)

☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 38 1/2" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

|  |                        |      |   |                       |
|--|------------------------|------|---|-----------------------|
| Job Name   | Approved By Print Name | Date | <b>COMFORT DESIGNS</b>  |                       |
| Project No   | Approved By Signature  |      | Model No. XST 3838 BF RRF 1.0 RRF-1   |                       |
| Comfort Designs<br>435 Industrial Road<br>Savannah, TN 38372<br>tel 800.443.7269<br>fax 731.925.4290<br>www.comfortdesignsbathware.com | Architect              |      | Drawing No. XST 3838 BF RRF 1.0 ANSI-B Wood Backing WCR Tri-Cell Easy Base              |                       |
|  | Engineer               |      | Date Issued. 9-29-14  | Drawing Rev. 11-15-16 |
|  | Rep                    |      | Material. Acrylic Surface   |                       |
|  | Wholesaler             |      | Color.  |                       |
|  | Comments               |      | Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2" |                       |