


SIDE VIEW




## **SUBMITTAL**

This shower enclosure shall be model SSS 4248 BF.75" right, or left. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.


The unit shall have outside dimensions of 45"  $\times$  51 5/8"  $\times$  76". The unit shall meet ANSI Z124.1-2. HUD, FHA, BOCA, NAHB, UPC, and shall meet the requirements of the California Building Code Title 24, and the Southern Building Code.





The enclosure shall be equipped with the following accessories. I) One 20"  $\times$  I I/2" diameter I8 gauge stainless steel grab bar horizontal on the back wall, 2) one 42"  $\times$  I I/2" diameter I8 gauge stainless steel grab bar horizontal on the side wall, 3) one 24"  $\times$  I I/2" diameter, I8 gauge stainless steel grab bar, vertical on the seat side wall, all with I I/2" statute clearance, secured from the rear with stainless steel bolts and 3"  $\times$  3"  $\times$  I I gauge metal mounting plates, 4) one inch diameter I8 gauge stainless steel curtain rod with receiver cups, 5) framed white 44 I/2"  $\times$  22 I/2" padded fold up seat, 6) tri cell backing, 7) .75" Change of Level Threshold.

## CROSS SECTION OF THRESHOLD

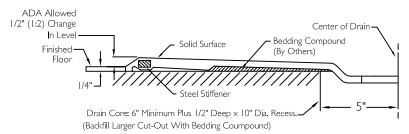

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 45" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. SSS 4248 BF .75-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. SSS 4248 BF .75 HBW HSW VSW FPD CR	
	Rep			Date Issued. 7-6-12	Drawing Rev.
	Wholesaler			Material. Solid Surface	
	Comments			Color,	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm$ 1/2"	