




TOP VIEW

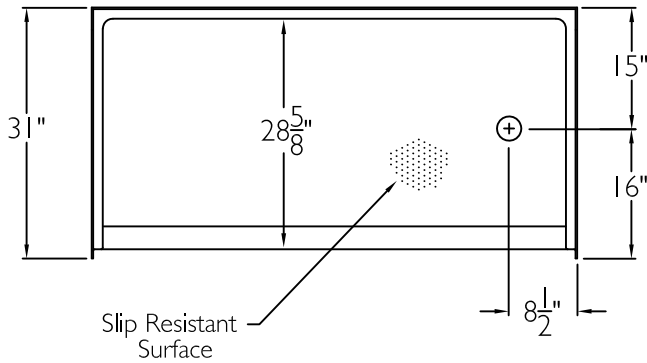

FRONT VIEW

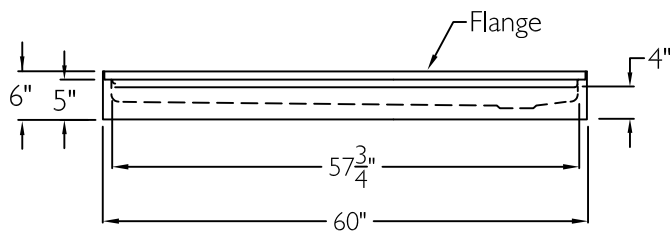

SIDE VIEW



## SUBMITTAL

This shower enclosure shall be model SSB 6030 SH 4.0 Base left or right drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 60" x 31" x 4 1/2" with a 4.0" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, UPC, CSA B45.5, Home Innovation Research Lab, shall meet the requirements of the Southern Building Code.

## HANDED BY THE DRAIN

The enclosure shall be equipped with the following features:

- 1) Solid Surface finish,
- 2) Slip resistant surface on floor,
- 3) Left or right drain location,
- 4) 4.0" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 60" AND 31". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: SST 6030 SH 4.0 L-R.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. SSB 6030 SH 4.0 Base L-R	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect			Drawing No. SSB 6030 SH 4.0 L-R	
	Engineer			Date Issued. 4-24-12	Drawing Rev. 5-23-16
	Rep			Material. Solid Surface	
	Wholesaler			Color.	
	Comments				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2"$